



Developed for demanding environments in indoor or outdoor events, **Astra 270HDL** offers a range of IP65 LED fixtures combining power, optical precision and long-lasting reliability.

Thanks to its 18x15W RGB + Lime LEDs and 12° fixed angle, **Astra 270HDL** provides rich and subtle colour mixing, delivering both deep saturated colours and accurately calibrated whites, with smooth fades and excellent uniformity.

Astra 270HDL is ideal for lighting live shows, scenic elements and architectural façades.

Its die-cast aluminium housing ensures optimal thermal management and robustness, perfectly suited for intensive professional use.

Designed to adapt to any configuration, **Astra 270HDL** offers a selection of clip-on optical filters in 20°, 40°, 60°, 60° x 10° and frost (100°), allowing the beam angle to be adjusted from wide wash applications to more directional uses.

In terms of control, **Astra 270HDL** provides advanced flexibility : the fixtures can be operated via a Bluetooth app, enabling mesh networking, remote configuration and fast fixture setup. For traditional installations, wired DMX control ensures seamless integration with any lighting console, with remote adjustment of modes and addressing.

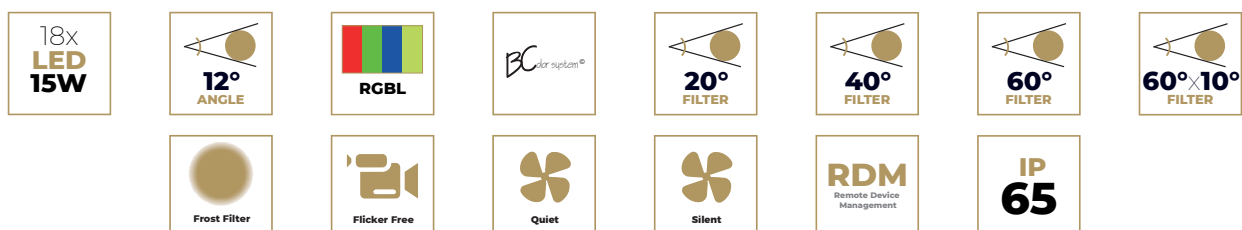


Table of Contents

Specifications	3
Photometric Data 12° Native	4
Photometric Data 20° Filter	5
Photometric Data 40° Filter	6
Photometric Data 60° Filter	7
Photometric Data 60°x10° Filter	8
RGB + Lime Spectrum Test Report	10
3200 K (calibrated macro) Spectrum Test Report	12
5600 K (calibrated macro) Spectrum Test Report	14
6500 K (calibrated macro) Spectrum Test Report	16
8000 K (calibrated macro) Spectrum Test Report	18
Red @100% Spectrum Test Report	20
Green @100% Spectrum Test Report	21
Blue @100% Spectrum Test Report	22
Lime @100% Spectrum Test Report	23

[Find the technical datasheet here :](#)



Download

[Manual](#)



[DMX Chart](#)



[All Downloads](#)



Source

Engine	RGB + Lime
LED Watts	18 x 15W
Engine CCT	9500K (Full RGBL - no optics)
Engine Life (L70)	> 20000 H
Refresh Rate	900Hz to 25 kHz
Dimming	Electronic - 16 bits
Dimming Curves	Linear, Square, Inv Square, S-curve
Dimming Modes	Dim0 (0s), Dim1 (0.25s), Dim2 (0.5s), Dim3 (0.75s), Dim4 (1s)
Strobe Speed	1 - 25 Hz
Strobe Modes	Standard, Pulse, Random

Performances

Fixture Luminous Flux (Max)	10770 lm
Fixture Illuminance	Narrow: 6957 lux@5m 12° Medium: 3027 lux@5m 20° Wide: 503 lux@5m 60°
Fixture CCT Output	1800 - 10000 K
CRI	@6500k: 86 @3200k: 86.9
Tm30	@6500k: 84.12 @3200k: 85.13
TLCI	@6500k: 83.6 @3200k: 74.77
CQS	@6500k: 86.23 @3200k: 86.31



Optical

Lens Diameter	30 mm (Individual) 172.9 mm (Total)
---------------	--



Colour System

Colour System	RGBL - BC Color System
Control	8 bits / 16 bits



Photometric Data - 12° (NATIVE)

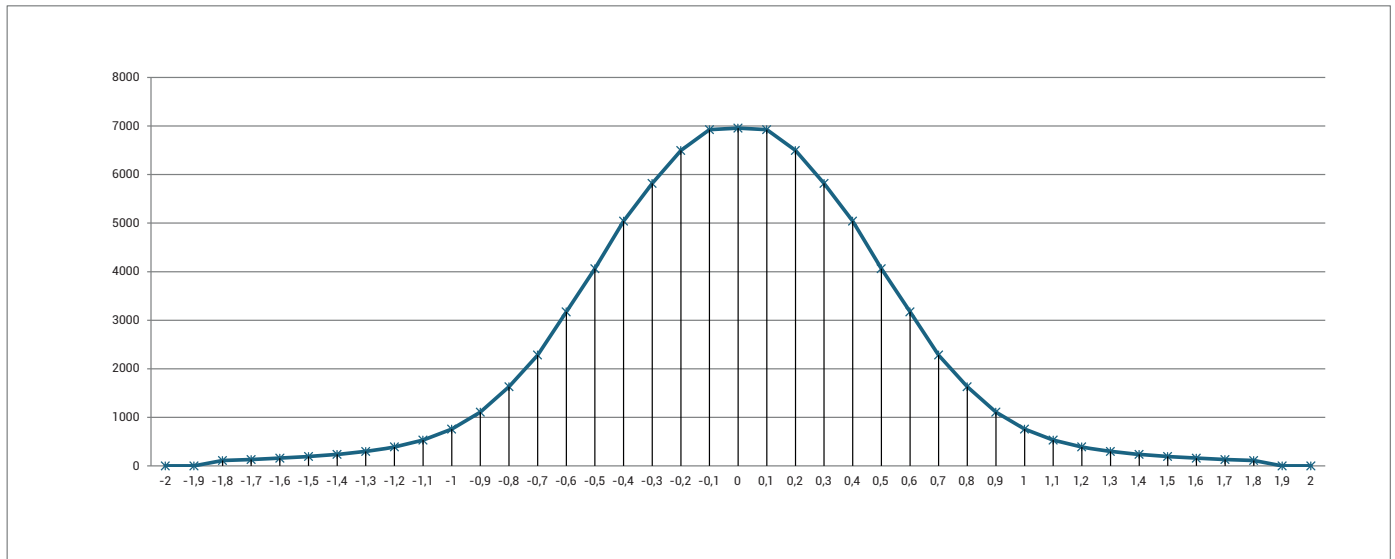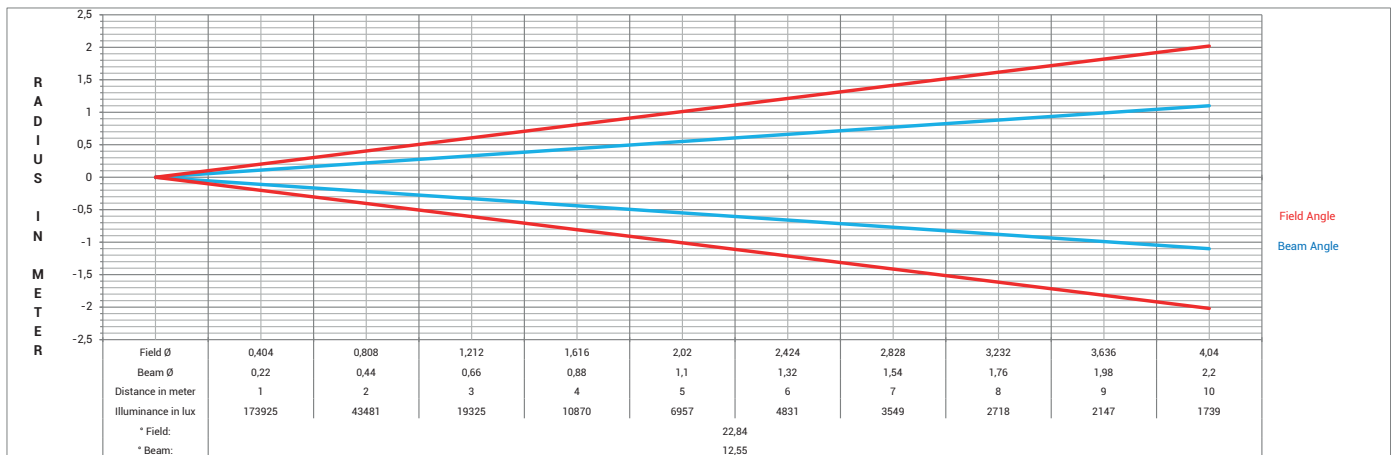



Photometric Data - 20° Filter

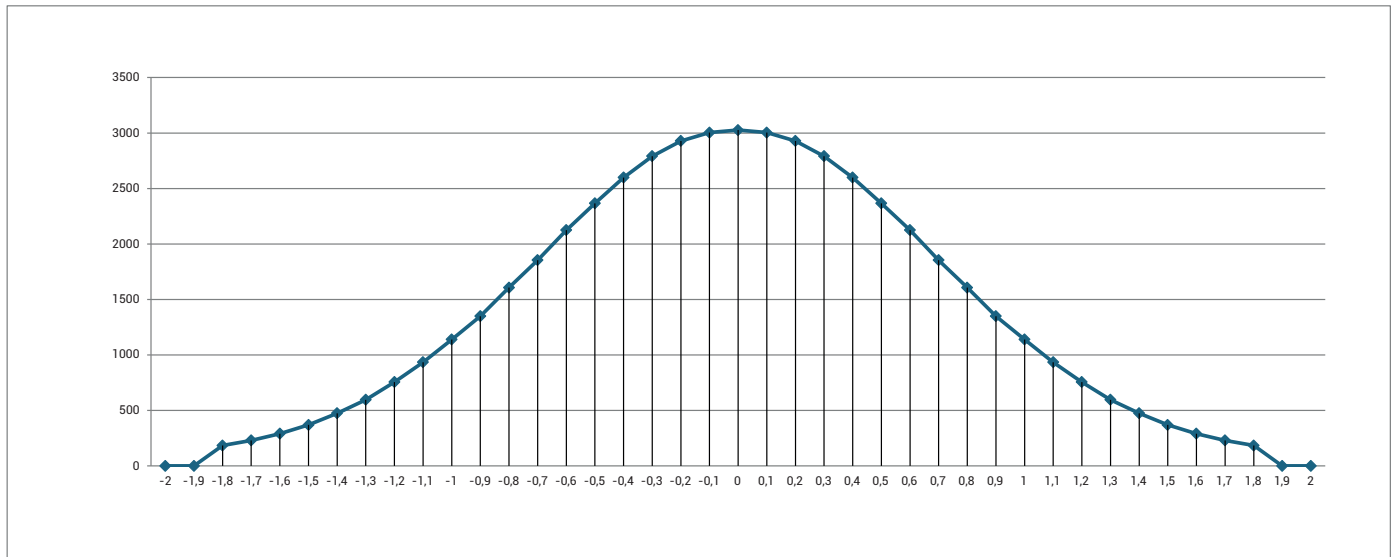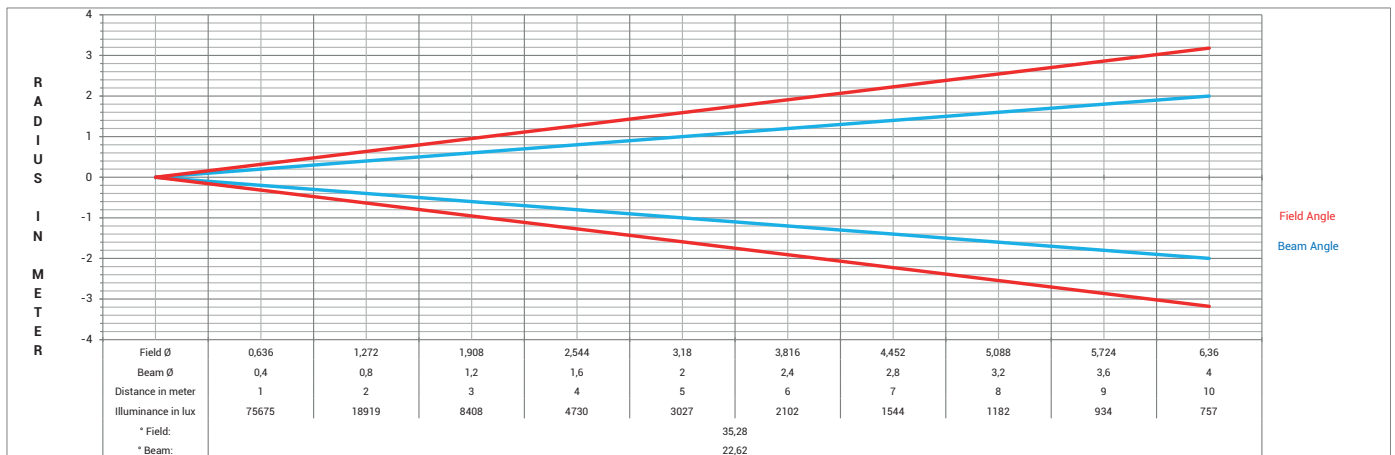

Photometric Data - 40° Filter

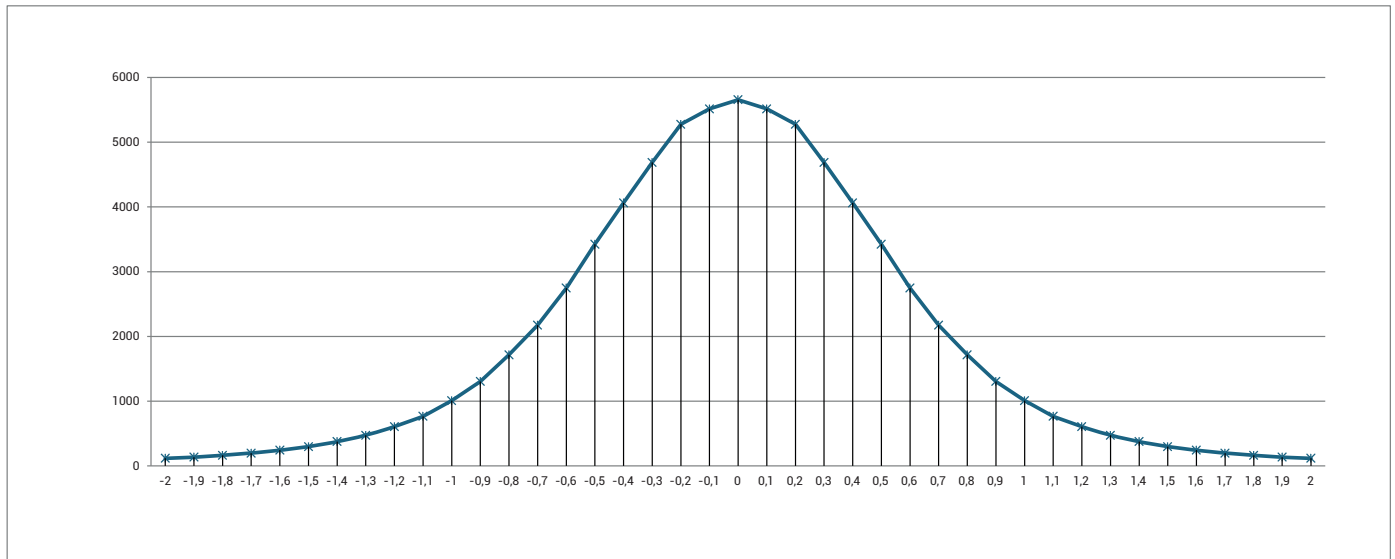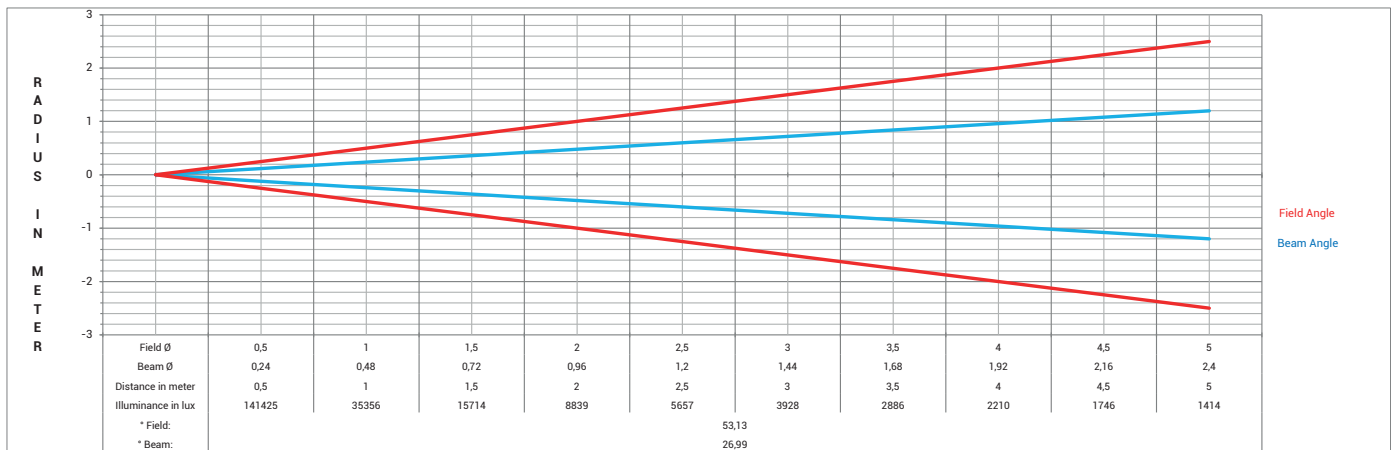


Photometric Data - 60° Filter

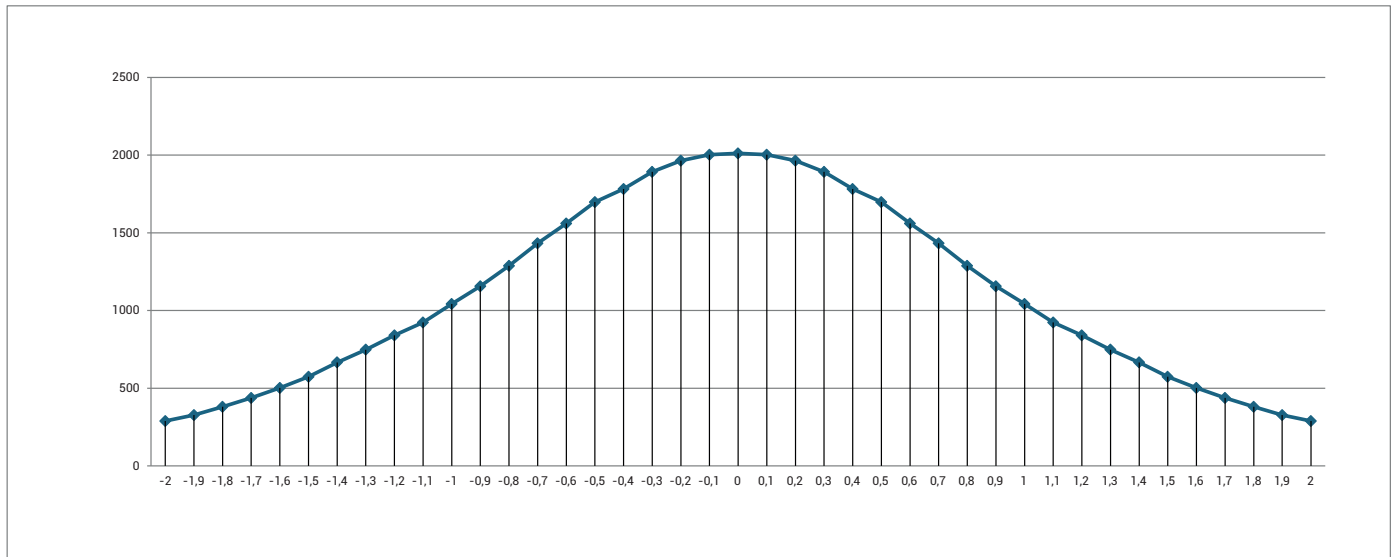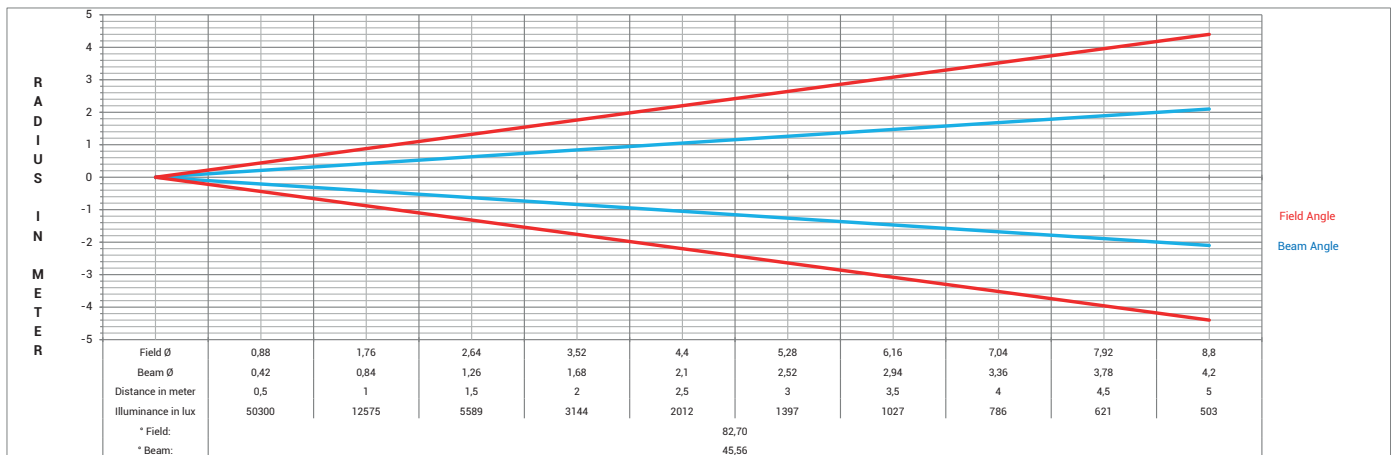


Photometric Data - 60°x10° Filter

Horizontal illumination

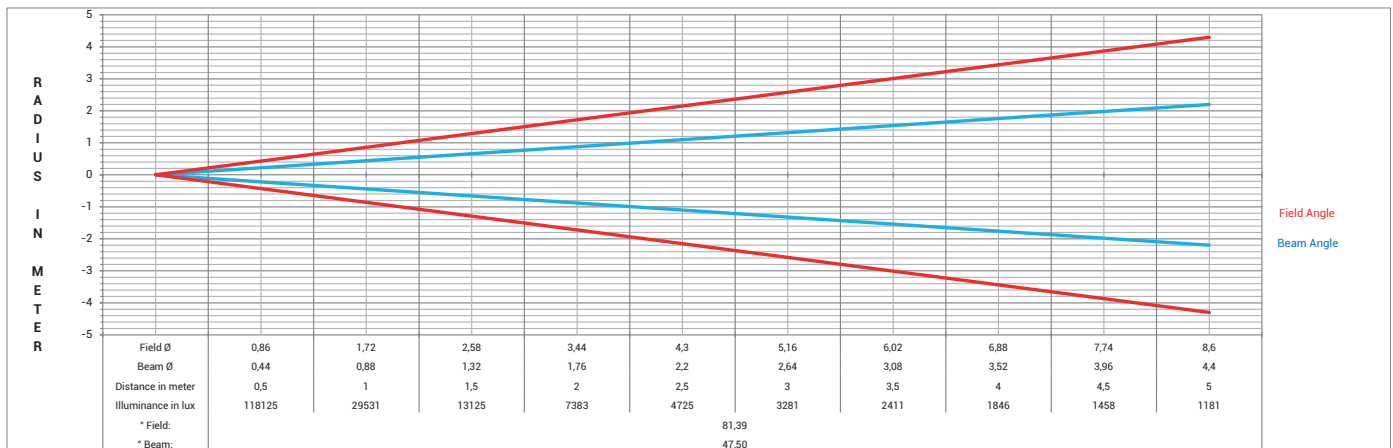


Vertical illumination

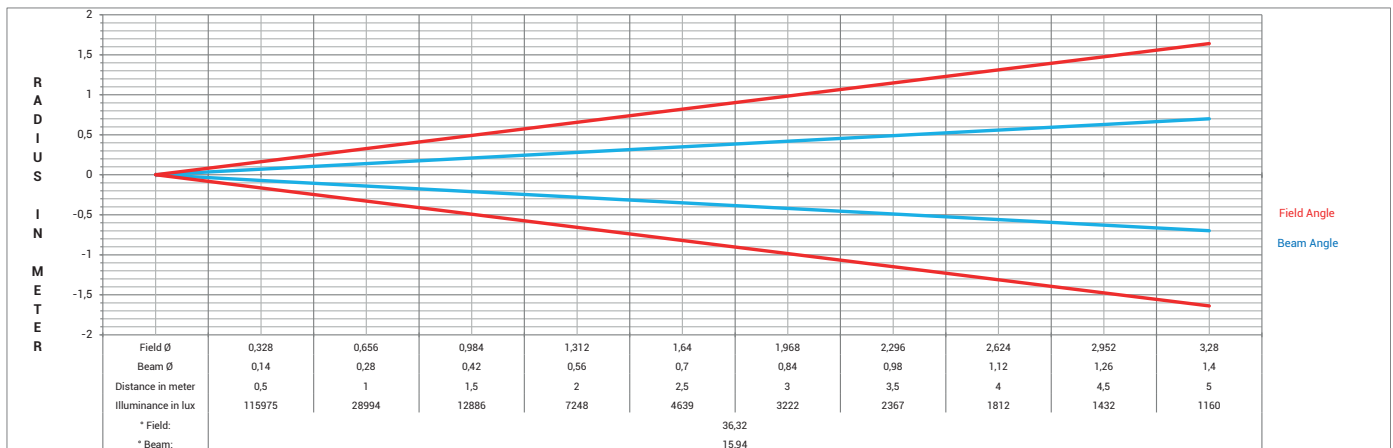


Photometric Data - 60°x10° Filter

Horizontal distribution

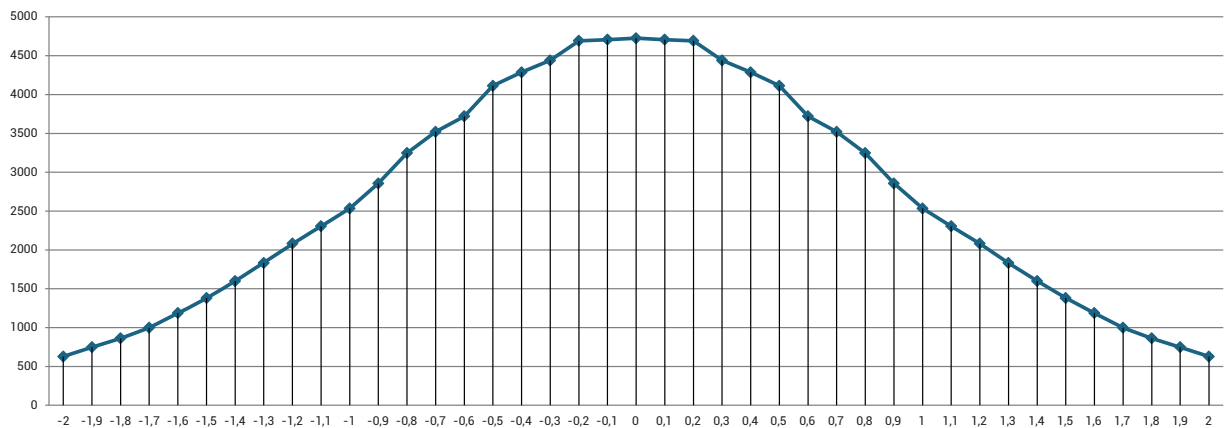

Vertical distribution

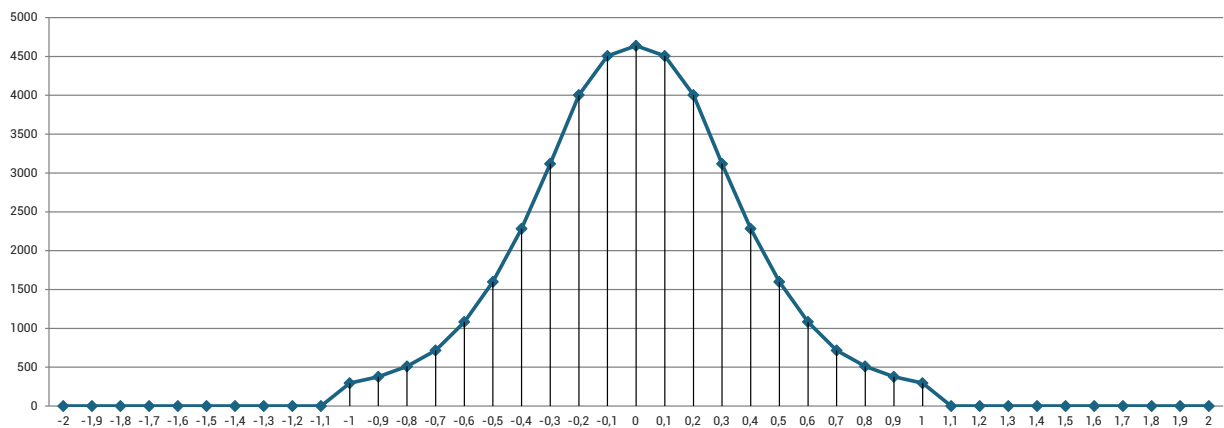

RGB + Lime Spectrum Test Report

Native 12° @ 5m

UPRtek
United Power Research Technology Corporation


Information

User :	Measure Time :18:11:50
Model NO. : MK350S PREMIUM	Light Source :
Memo :	
Native FULL	



BASIC

CRI	: 61,0
x	: 0,2880
y	: 0,2621
CCT	: 10977
LUX	: 6122



Spectrum

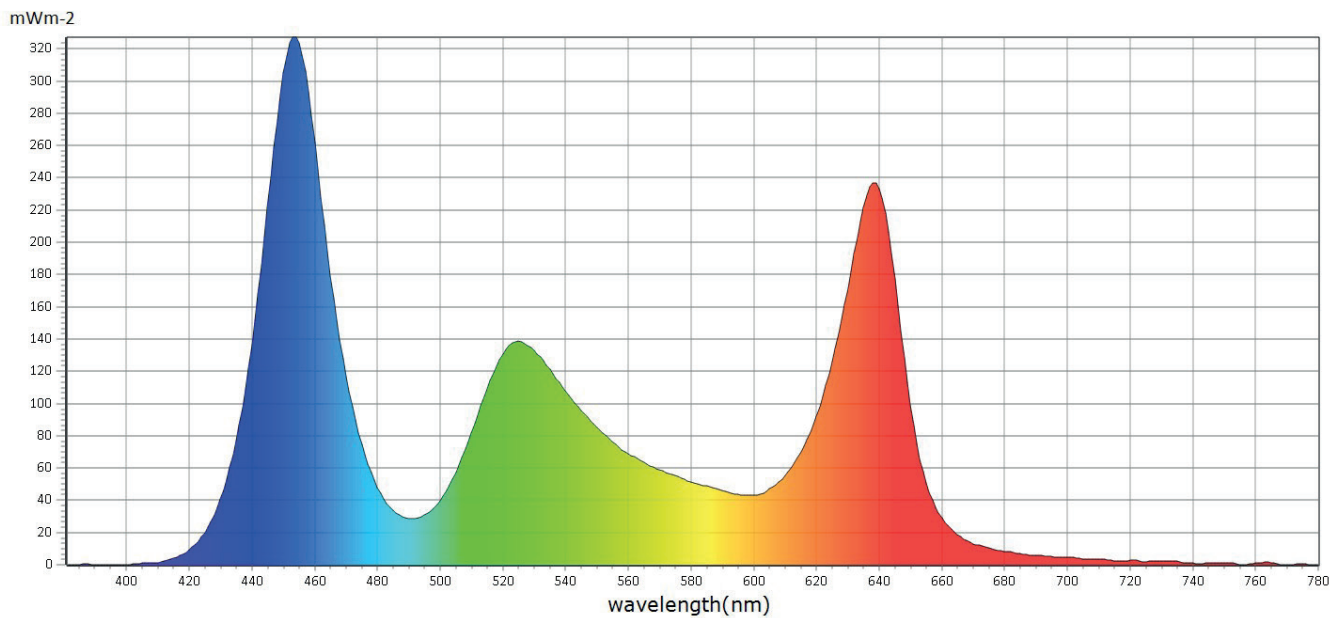

CIE1931



CIE1976

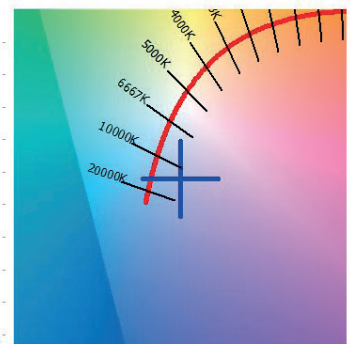

RGB + Lime Spectrum Test Report

Native 12° @ 5m

UPRtek
United Power Research Technology Corporation


Information

User : Measure Time :18:11:50
Model NO. : MK350S PREMIUM Light Source :
Memo :
Native FULL


BASIC

CRI : 61,0
X : 0,2880
Y : 0,2621
CCT : 10977
LUX : 6122


CRI: 61,04

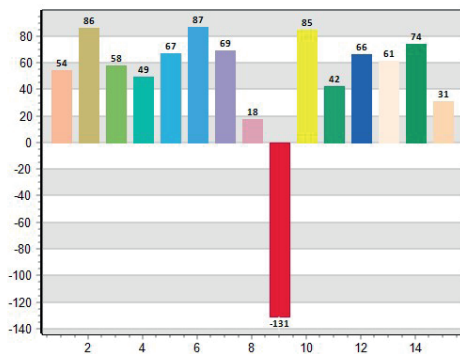


CQS: 82,85

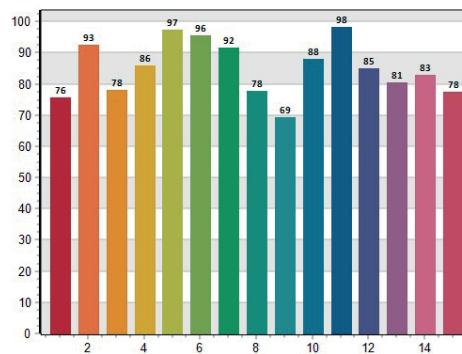


CRI-2

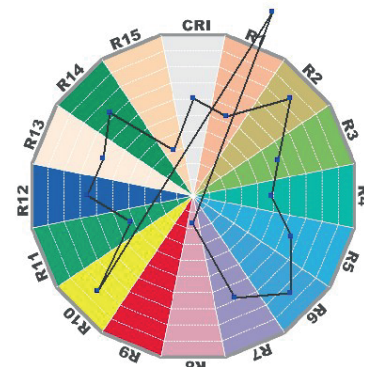

TM30: 73,04

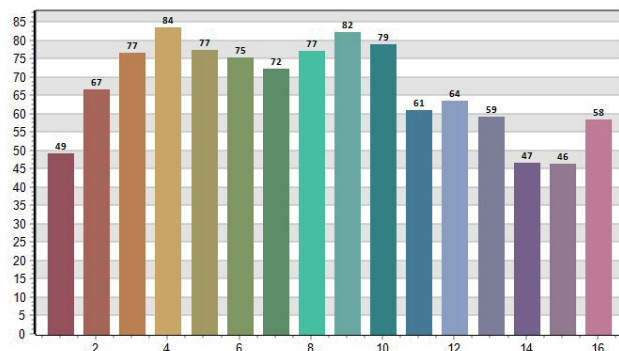

TLCI: 47,83

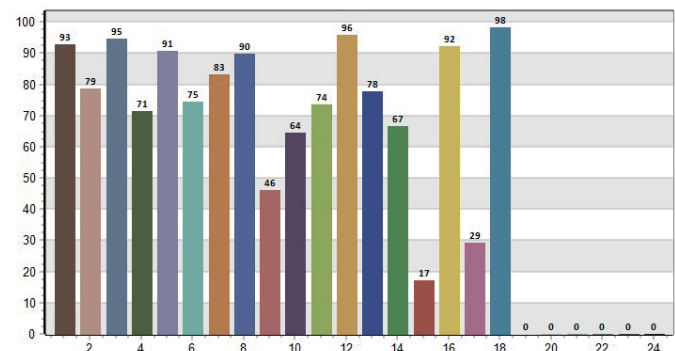

CRI values, only R1-R8 are used to calculate final CRI

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
54,3	86,2	57,8	49,2	67,1	86,8	69,4	17,6	-130,9	84,6	42,5	66,4	61,2	73,9	31,1

TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
49,1	66,7	76,7	83,5	77,3	75,3	72,4	77,1	82,1	79,0	60,9	63,6	59,1	46,6	46,4	58,3

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
75,6	92,6	78,0	85,9	97,5	95,6	91,6	77,8	69,3	88,1	98,3	85,0	80,6	83,0	77,6

3200 K (calibrated macro) Spectrum Test Report

Native 12° @ 5m

UPRtek
United Power Research Technology Corporation


Information

User :	Measure Time :18:35:07
Model NO. : MK350S PREMIUM	Light Source :
Memo :	
Native 3200	



BASIC

CRI	: 86,9
x	: 0,4246
y	: 0,4032
CCT	: 3210
LUX	: 3495



Spectrum

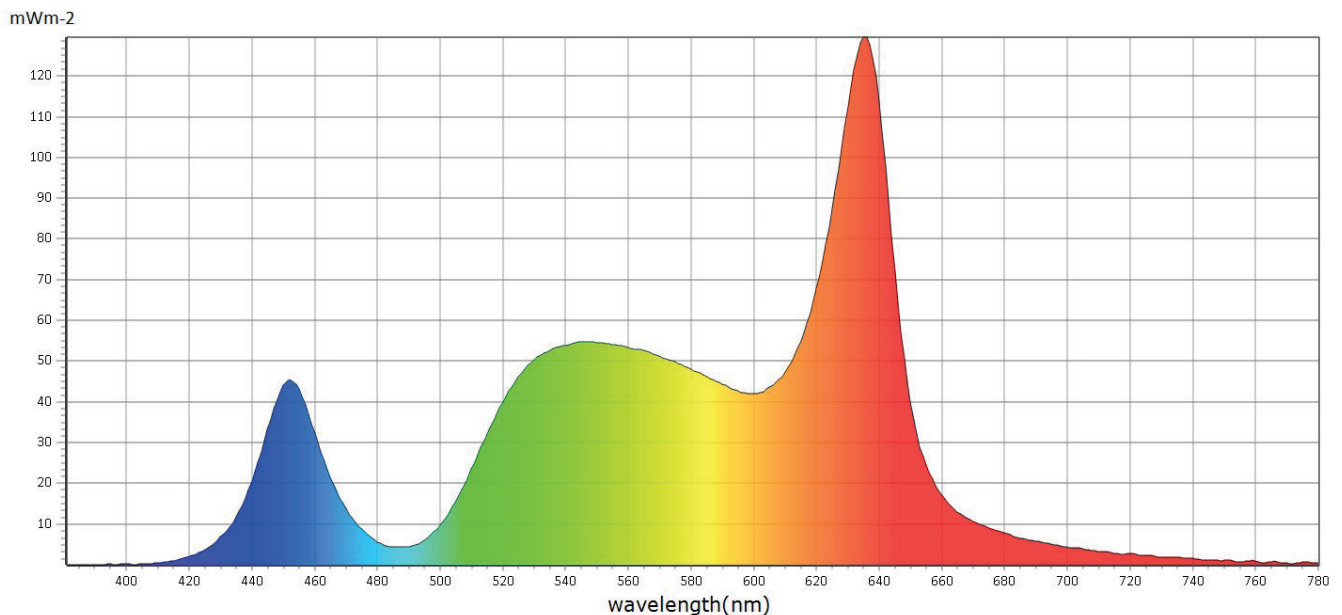

CIE1931

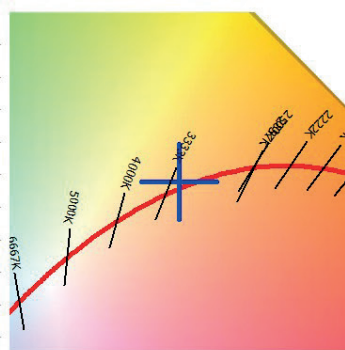

CIE1976

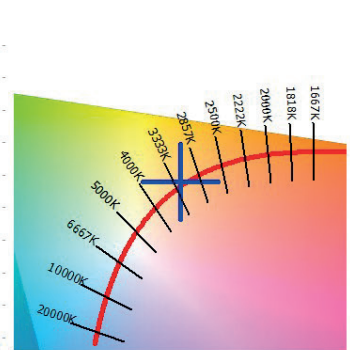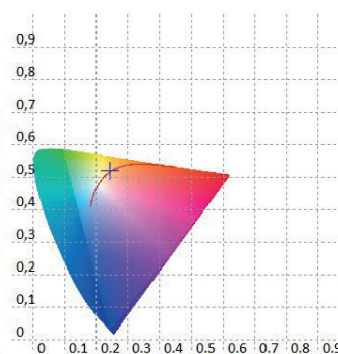

3200 K (calibrated macro) Spectrum Test Report

Native 12° @ 5m

UPRtek
United Power Research Technology Corporation


Information

User : Measure Time :18:35:07
Model NO. : MK350S PREMIUM Light Source :
Memo :
Native 3200


BASIC

CRI : 86,9
X : 0,4246
Y : 0,4032
CCT : 3210
LUX : 3495


CRI: 86,91

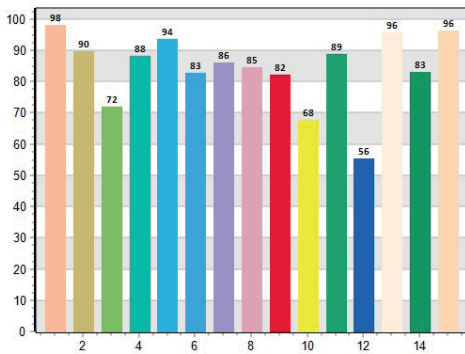


CQS: 86,31

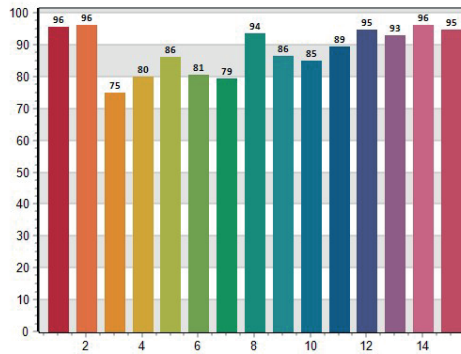


CRI-2

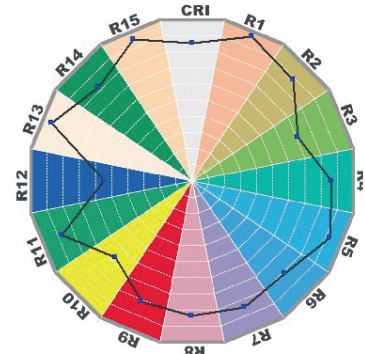

TM30: 85,13

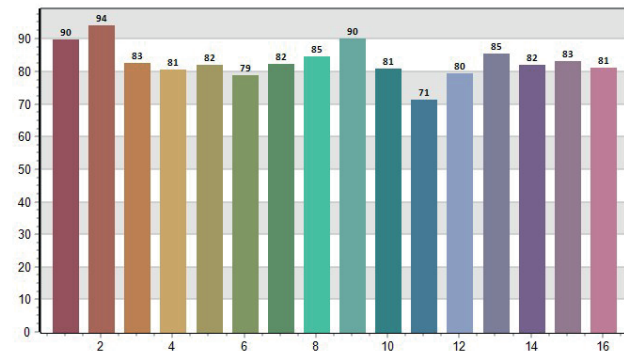

TLCI: 74,77

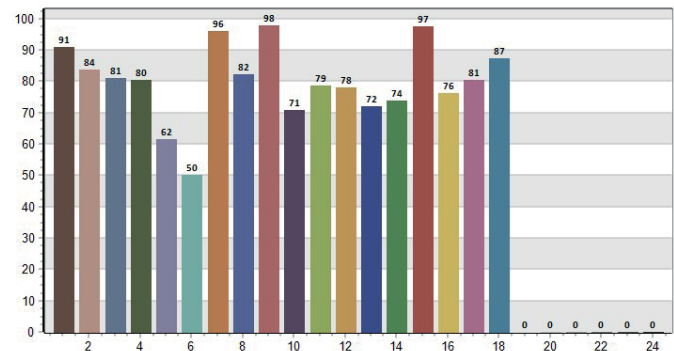

CRI values, only R1-R8 are used to calculate final CRI

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
98,1	89,8	72,1	88,1	93,5	82,7	86,2	84,7	82,1	67,8	88,8	55,5	95,7	83,0	96,3

TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
89,8	94,2	82,5	80,7	82,0	78,9	82,3	84,6	90,2	80,8	71,5	79,5	85,4	82,1	83,2	81,1

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
95,5	96,1	75,1	80,1	86,1	80,6	79,3	93,5	86,4	85,1	89,5	94,6	93,1	96,2	94,6

5600 K (calibrated macro) Spectrum Test Report

Slot #7

Native 12° @ 5m

UPRtek
United Power Research Technology Corporation


Information

User :	Measure Time :18:35:21
Model NO. : MK350S PREMIUM	Light Source :
Memo :	
Native 5600	



BASIC

CRI	: 85,8
x	: 0,3296
y	: 0,3435
CCT	: 5623
LUX	: 3983



Spectrum

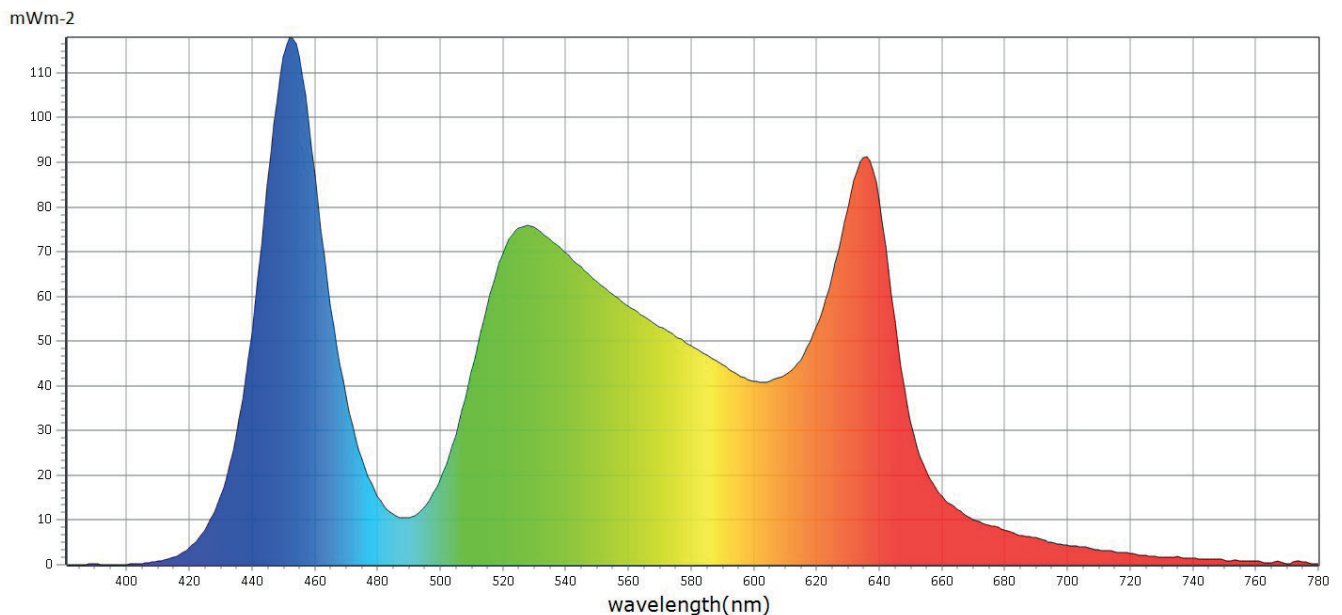

CIE1931

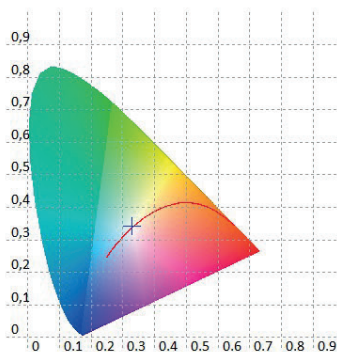

CIE1976

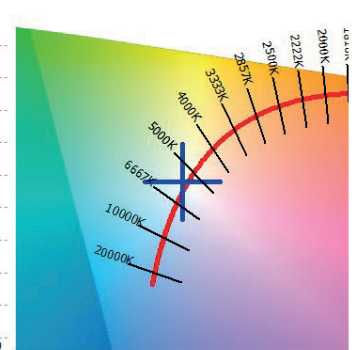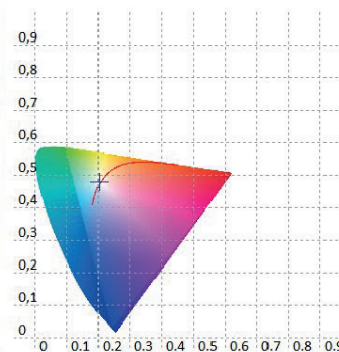

5600 K (calibrated macro) Spectrum Test Report

Native 12° @ 5m

UPRtek
United Power Research Technology Corporation


Information

User :	Measure Time :18:35:21
Model NO. : MK350S PREMIUM	Light Source :
Memo :	
Native 5600	


BASIC

CRI	: 85,8
X	: 0,3296
Y	: 0,3435
CCT	: 5623
LUX	: 3983


CRI: 85,80

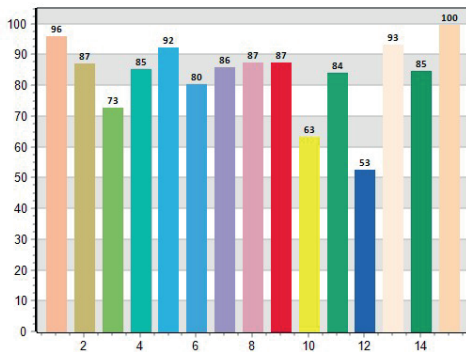


CQS: 86,07

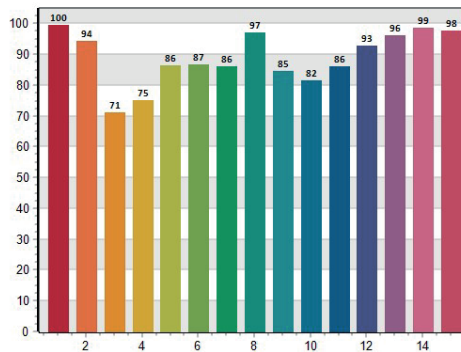


CRI-2

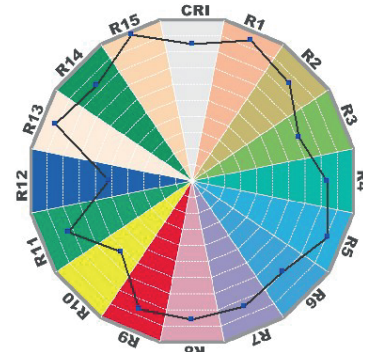

TM30: 84,24

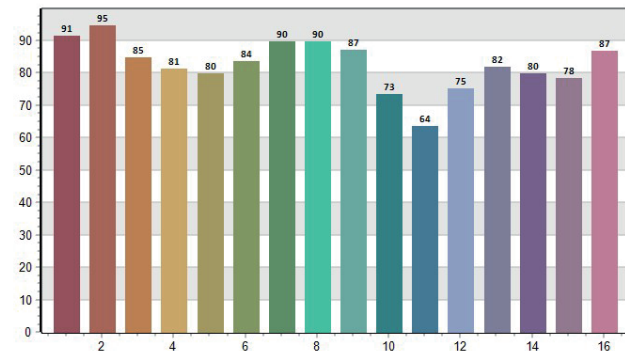

TLCI: 82,09

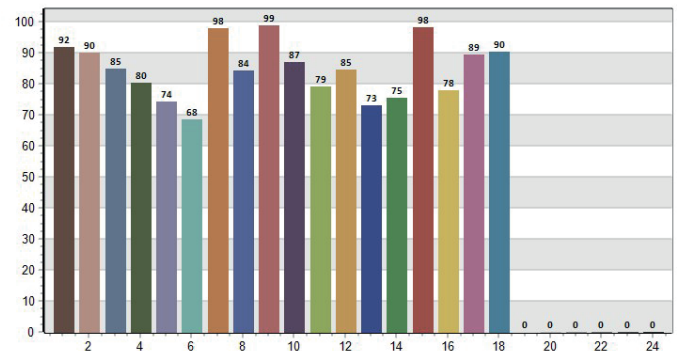

CRI values, only R1-R8 are used to calculate final CRI

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
96,0	86,9	72,6	85,2	92,2	80,4	85,8	87,3	87,3	63,3	84,1	52,5	93,1	84,8	99,6

TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
91,3	94,6	84,7	81,4	79,8	83,5	89,6	89,7	87,0	73,4	63,6	75,1	81,9	79,7	78,4	86,9

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
99,5	94,4	71,0	75,0	86,4	86,8	86,0	97,1	84,5	81,5	86,0	92,8	96,0	98,6	97,6

6500 K (calibrated macro) Spectrum Test Report

Native 12° @ 5m

UPRtek
United Power Research Technology Corporation


Information

User :	Measure Time :18:35:24
Model NO. : MK350S PREMIUM	Light Source :
Memo :	
Native 6500	


BASIC

CRI	: 86,0
x	: 0,3130
y	: 0,3270
CCT	: 6503
LUX	: 4153


Spectrum

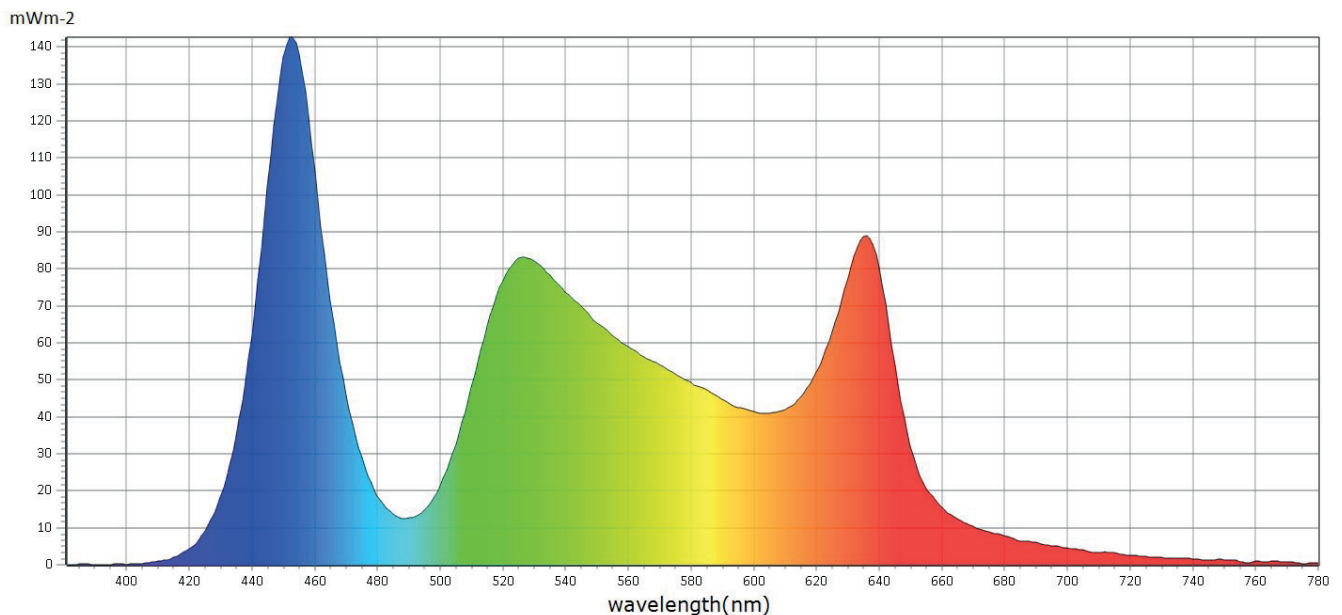

CIE1931

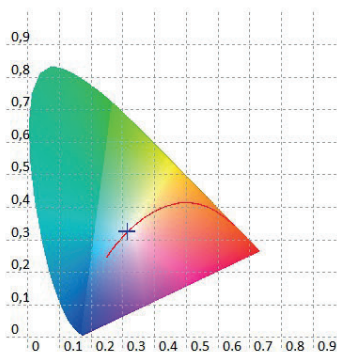

CIE1976

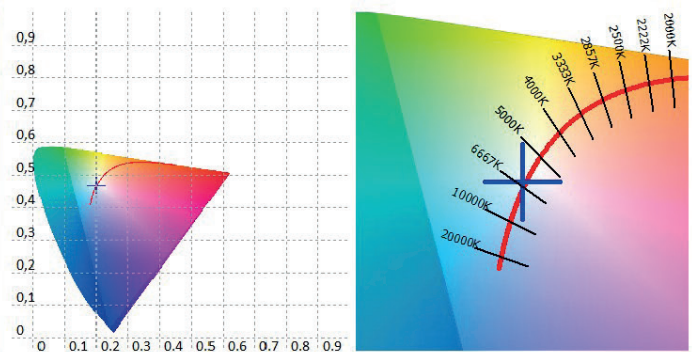

6500 K (calibrated macro) Spectrum Test Report

Native 12° @ 5m

UPRtek
United Power Research Technology Corporation


Information

User : Measure Time :18:35:24
Model NO. : MK350S PREMIUM Light Source :
Memo :
Native 6500


BASIC

CRI : 86,0
X : 0,3130
Y : 0,3270
CCT : 6503
LUX : 4153


CRI: 85,96

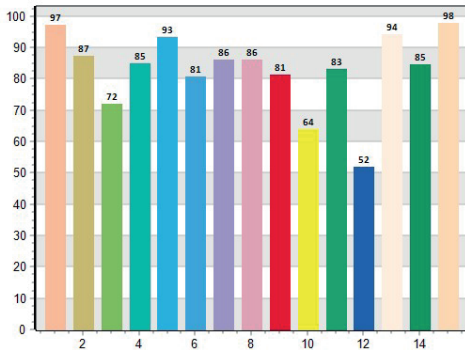


CQS: 86,23

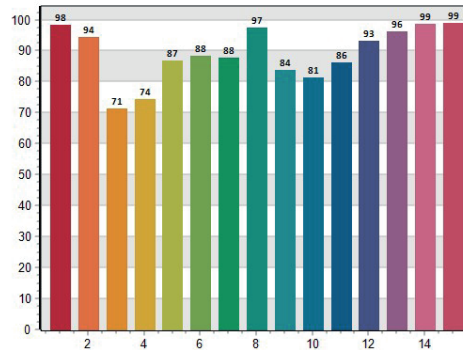


CRI-2

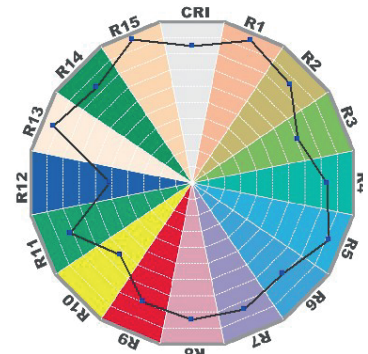

TM30: 84,12

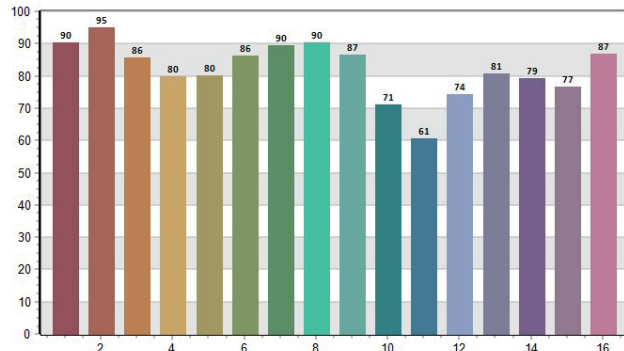

TLCI: 83,60

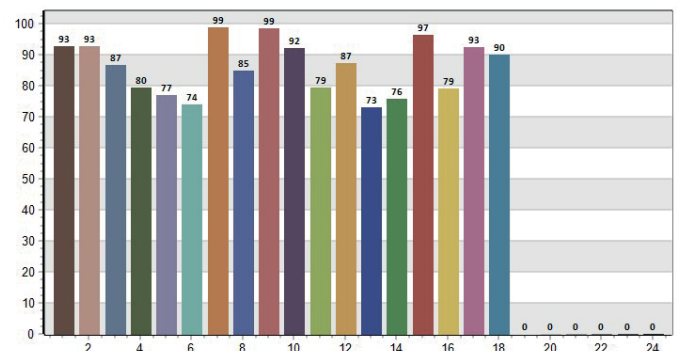

CRI values, only R1-R8 are used to calculate final CRI

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
97,1	87,3	72,0	84,9	93,3	80,8	86,0	86,2	81,2	63,8	83,0	51,8	94,3	84,7	97,8

TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
90,5	95,1	85,8	79,8	80,2	86,3	89,6	90,3	86,5	71,1	60,6	74,3	80,9	79,3	76,7	87,0

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
98,4	94,3	71,5	74,3	86,7	88,4	87,7	97,4	83,8	81,4	86,1	93,3	96,1	98,5	98,9

8000 K (calibrated macro) Spectrum Test Report

Native 12° @ 5m

UPRtek
United Power Research Technology Corporation


Information

User :	Measure Time :18:35:27
Model NO. : MK350S PREMIUM	Light Source :
Memo :	
Native 8000	


BASIC

CRI	: 85,9
x	: 0,2940
y	: 0,3072
CCT	: 8029
LUX	: 4259




Spectrum

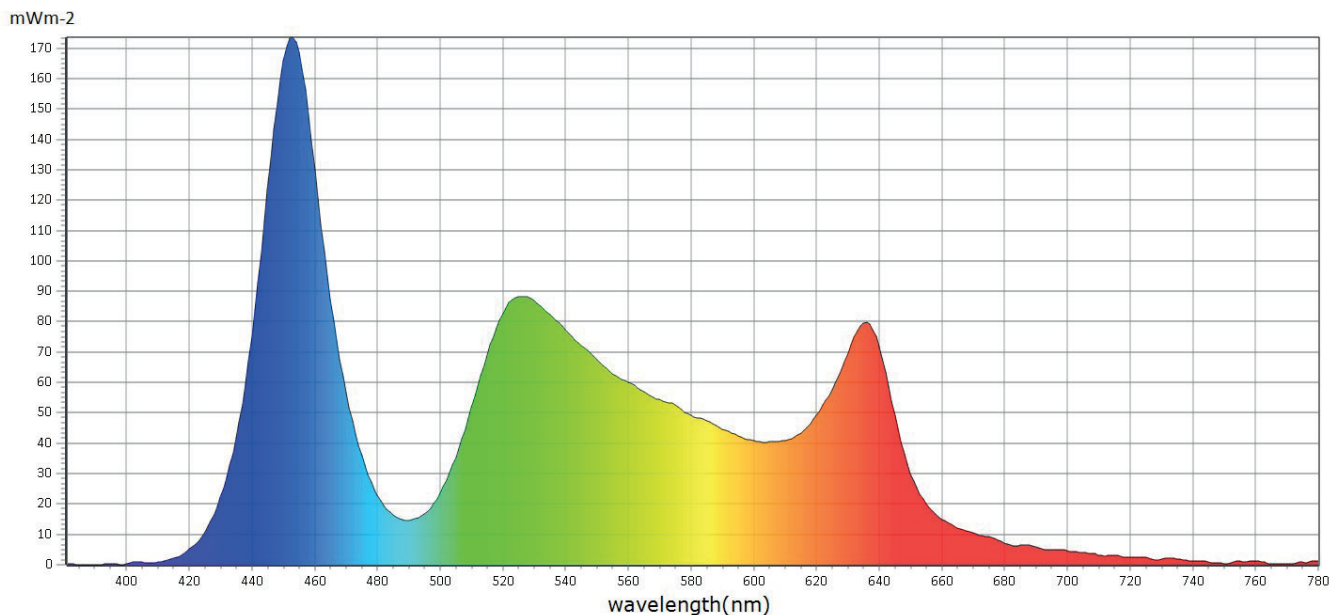

CIE1931

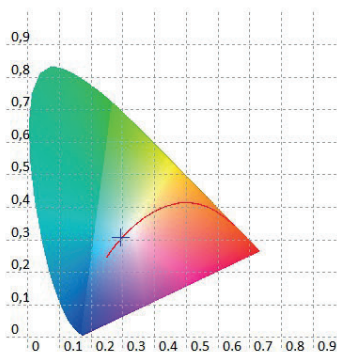

CIE1976

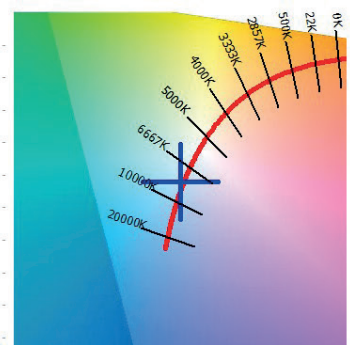

8000 K (calibrated macro) Spectrum Test Report

Native 12° @ 5m

UPRtek
United Power Research Technology Corporation


Information

User : Measure Time :18:35:27
Model NO. : MK350S PREMIUM Light Source :
Memo :
Native 8000


BASIC

CRI : 85,9
X : 0,2940
Y : 0,3072
CCT : 8029
LUX : 4259


CRI: 85,86

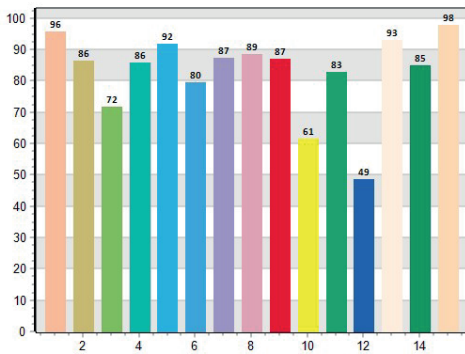


CQS: 85,39

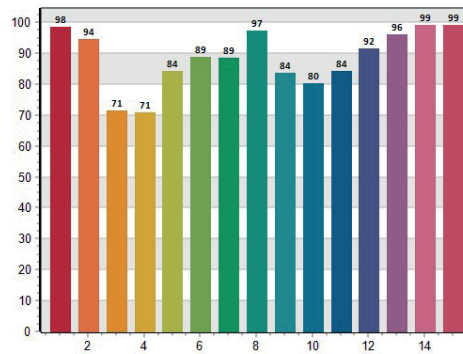


CRI-2

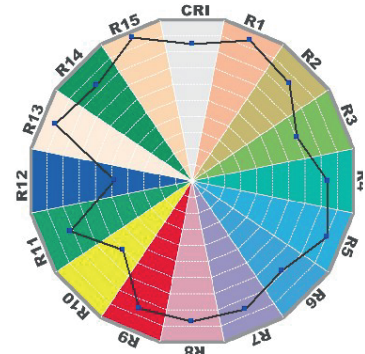

TM30: 83,26

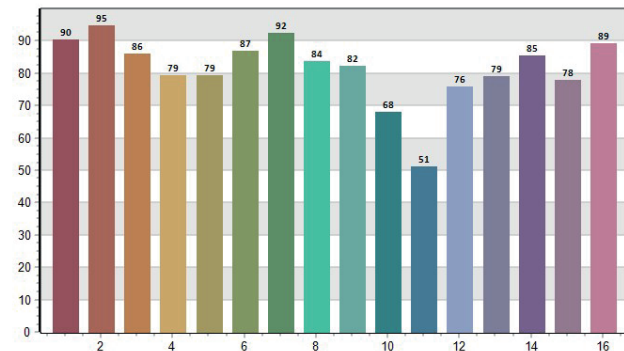

TLCI: 83,51

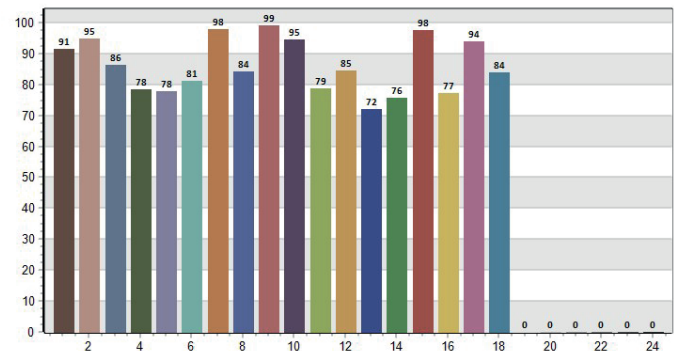

CRI values, only R1-R8 are used to calculate final CRI

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
95,8	86,5	71,6	85,7	92,0	79,6	87,2	88,6	87,0	61,4	82,9	48,7	93,2	84,9	97,8

TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
90,3	94,7	85,9	79,3	79,2	87,0	92,5	83,7	82,2	68,0	51,2	75,8	79,1	85,5	77,9	89,1

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
98,5	94,5	71,4	71,0	84,2	88,7	88,5	97,2	83,6	80,4	84,1	91,5	96,0	99,0	99,1

Red @100% Spectrum Test Report

Native 12° @ 5m

UPRtek
United Power Research Technology Corporation


Information

User :	Measure Time :18:11:39
Model NO. : MK350S PREMIUM	Light Source :
Memo :	
Native RED	


BASIC

CRI	: 0,0
x	: 0,6987
y	: 0,2999
CCT	: 0
LUX	: 1497


Spectrum

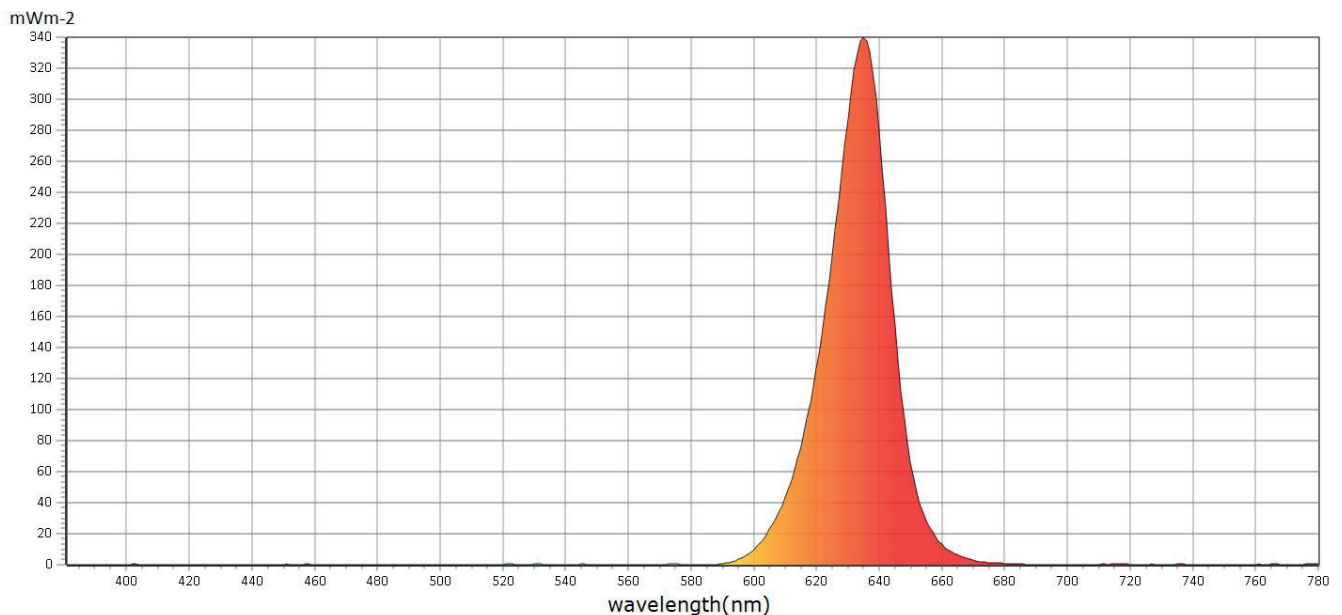

CIE1931

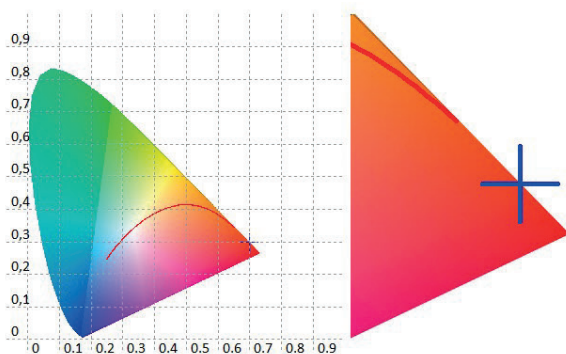

CIE1976

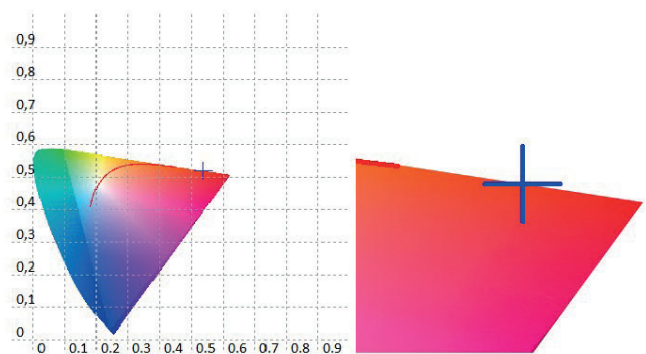

Green @100% Spectrum Test Report

Native 12° @ 5m

UPRtek
United Power Research Technology Corporation


Information

User :	Measure Time :18:11:42
Model NO. : MK350S PREMIUM	Light Source :
Memo :	
Native GREEN	


BASIC

CRI	: 0,0
x	: 0,1751
y	: 0,7243
CCT	: 7739
LUX	: 2099


Spectrum

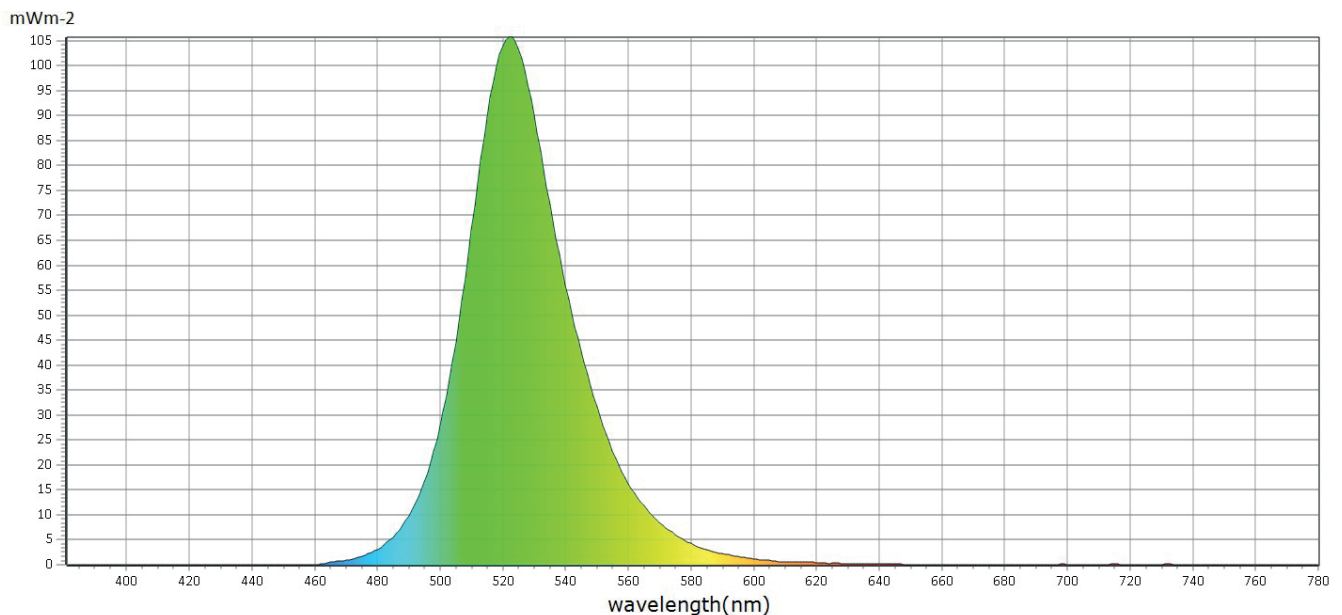

CIE1931

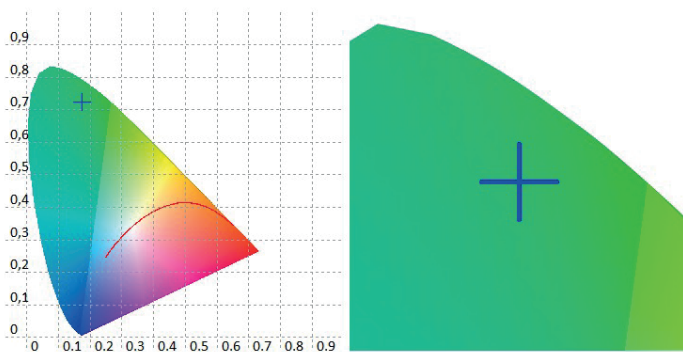

CIE1976

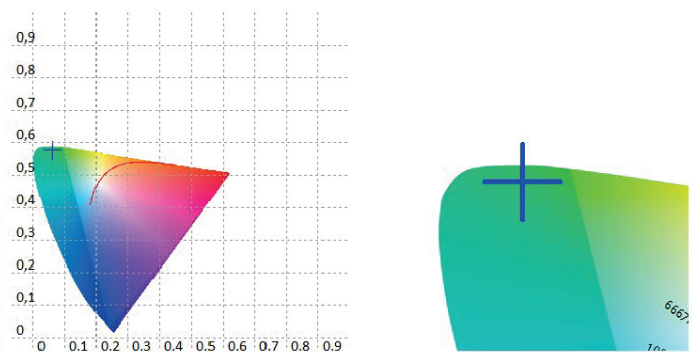

Blue @100% Spectrum Test Report

Native 12° @ 5m

UPRtek
United Power Research Technology Corporation


Information

User :	Measure Time :18:11:45
Model NO. : MK350S PREMIUM	Light Source :
Memo :	
Native BLUE	


BASIC

CRI	: 0,0
x	: 0,1513
y	: 0,0288
CCT	: 0
LUX	: 374,9


Spectrum

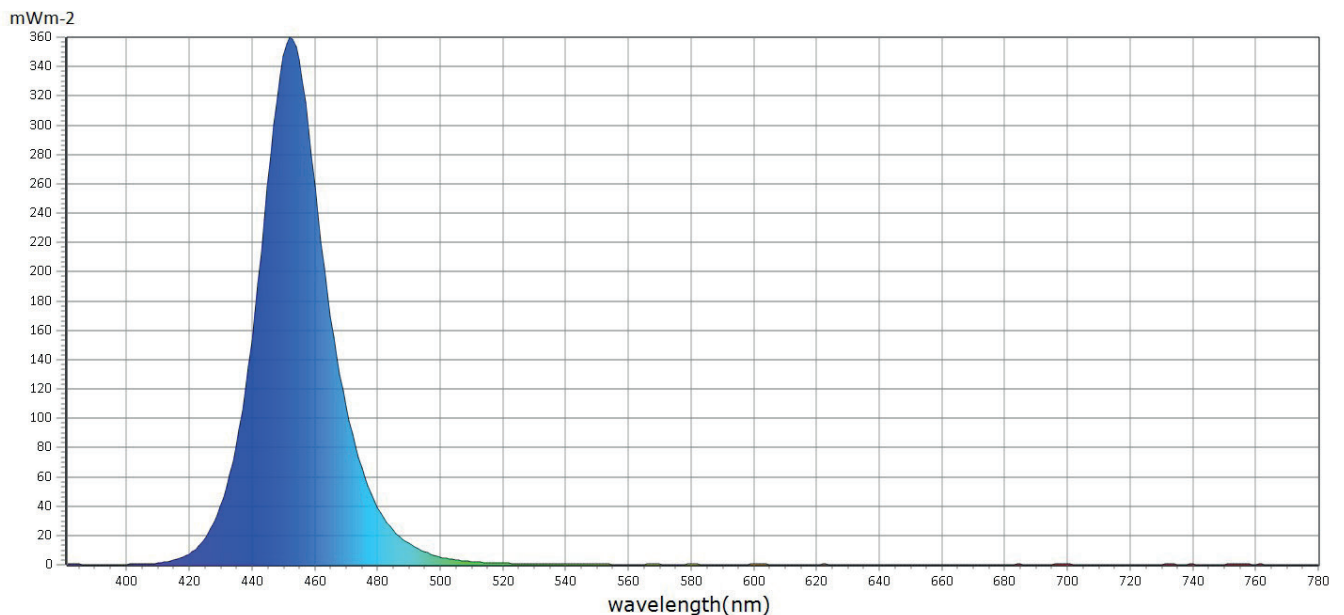

CIE1931

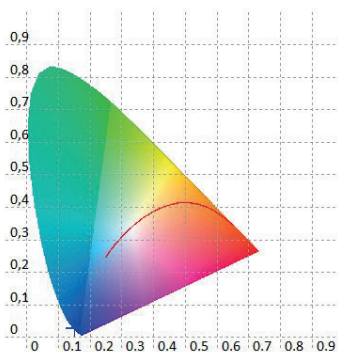

CIE1976

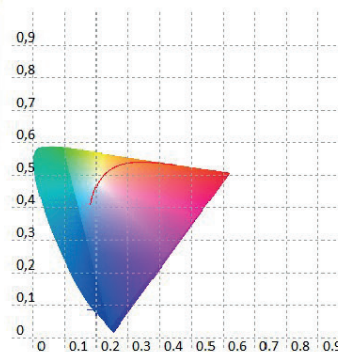

Lime @100% Spectrum Test Report

Native 12° @ 5m

UPRtek
United Power Research Technology Corporation


Information

User :	Measure Time :18:11:47
Model NO. : MK350S PREMIUM	Light Source :
Memo :	
Native LIME	



BASIC

CRI	: 46,5
x	: 0,4282
y	: 0,5417
CCT	: 3955
LUX	: 2971



Spectrum

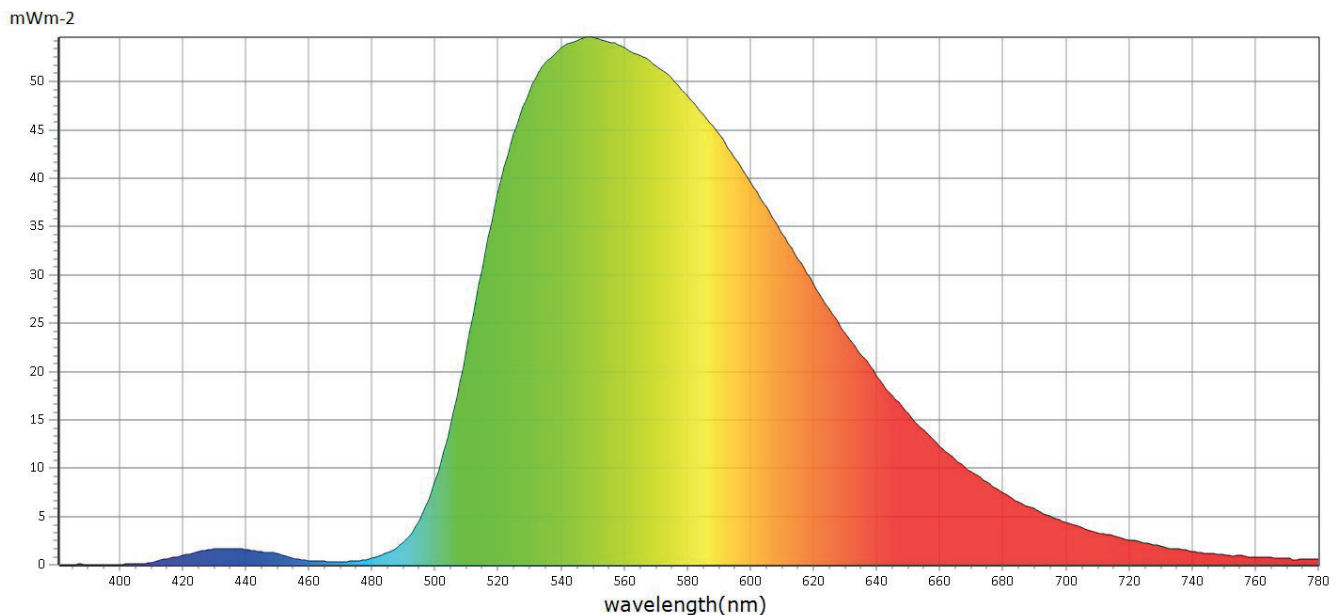

CIE1931

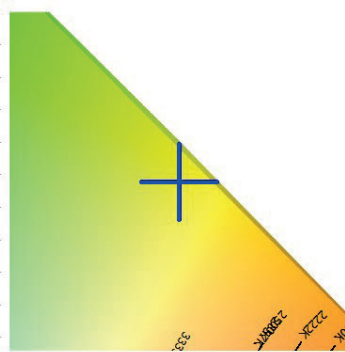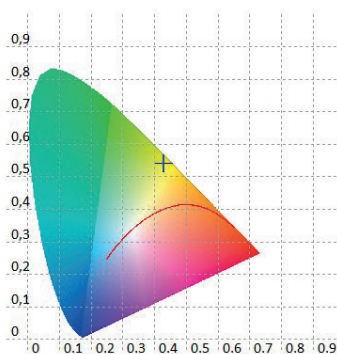

CIE1976

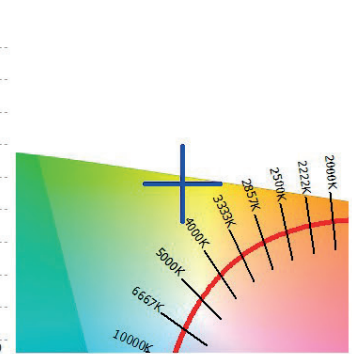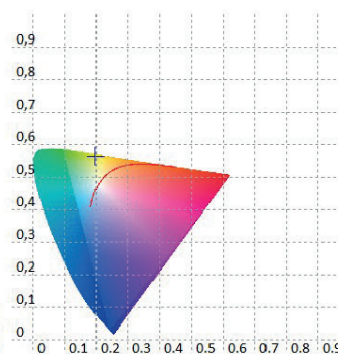

Starway

22 Rue Édouard Buffard
77144 Montevrain
France

starway.eu
