



Enzo is equipped with a 550W LED source developing a maximum flux of 25,000 lumens and a 6.5° to 41° zoom.

Enzo offers all the tools needed to give total creative freedom to designers such as: CMY color mixing, progressive CTO filter, 7-color wheel, 7 rotating gobos, 8 fixed gobos, animation wheel, a 3-facet circular prism, a 6-facet linear prism, iris, progressive frost and a Full curtain framing shutters.

Enzo offers all these features into a compact housing weighing just 31 kg.

Enzo will be the perfect tool for any performance or installation where powerful, compact spotlights are essential.



# Table of Contents

|                                                               |    |
|---------------------------------------------------------------|----|
| Specifications .....                                          | 3  |
| Colors & Filters.....                                         | 4  |
| Photometric Data Narrow Zoom.....                             | 5  |
| Photometric Data Medium Zoom .....                            | 6  |
| Photometric Data Wide Zoom.....                               | 7  |
| White Spectrum Test Report .....                              | 8  |
| High CRI Filter Spectrum Test Report.....                     | 10 |
| Eighth CTB Filter Spectrum Test Report.....                   | 12 |
| CTO @100% Spectrum Test Report .....                          | 14 |
| CTO @100% + High CRI Filter Spectrum Test Report .....        | 16 |
| Cyan @100% Spectrum Test Report.....                          | 18 |
| Magenta @100% Spectrum Test Report .....                      | 19 |
| Yellow @100% Spectrum Test Report .....                       | 20 |
| Cyan + Magenta @100% Spectrum Test Report .....               | 21 |
| Magenta + Yellow @100% Spectrum Test Report .....             | 22 |
| Cyan + Yellow @100% Spectrum Test Report.....                 | 23 |
| Plasa Red (Lee #029) Filter Spectrum Test Report .....        | 24 |
| Tokyo Blue (Lee #071) Filter Spectrum Test Report.....        | 25 |
| Twickenham Green (Lee #736) Filter Spectrum Test Report ..... | 26 |
| Deep Amber (Lee #104) Filter Spectrum Test Report.....        | 27 |
| AS Golden Amber (Lee #780) Filter Spectrum Test Report.....   | 28 |

## Source

|                   |                                                               |
|-------------------|---------------------------------------------------------------|
| Engine            | White CW                                                      |
| LED Watts         | 550W                                                          |
| Engine CCT        | 7000K                                                         |
| Engine Life (L70) | > 20000 H                                                     |
| Refresh Rate      | 900 Hz to 25 KHz                                              |
| Dimming           | Electronic - 16 bits                                          |
| Dimming Curves    | Linear, Square, Inv Square, S-curve                           |
| Dimming Modes     | Dim0 (0s), Dim1 (0.25s), Dim2 (0.5s), Dim3 (0.75s), Dim4 (1s) |
| Strobe Speed      | 1 - 20 Hz                                                     |
| Strobe Modes      | Standard, Pulse, Random                                       |

## Performances

|                             |                                                                                |
|-----------------------------|--------------------------------------------------------------------------------|
| Fixture Luminous Flux (Max) | 25000 lm                                                                       |
| Fixture Illuminance         | Narrow: 52200 lux@5m 6.5°<br>Medium: 14200 lux@5m 17°<br>Wide: 2600 lux@5m 41° |
| Fixture CCT Output          | 6500 K                                                                         |
| CRI                         | Native: 71.71<br>With High CRI filter: 90.66                                   |
| Tm30                        | Native: 71.6<br>With High CRI filter: 87.48                                    |
| TLCI                        | Native: 47.06<br>With High CRI filter: 73.19                                   |
| CQS                         | Native: 70.04<br>With High CRI filter: 89.16                                   |


## Optical

|               |            |
|---------------|------------|
| Lens Diameter | 115mm      |
| Zoom Range    | 6.5° - 41° |
| Zoom Ratio    | 6.3 :1     |


## Colour System

|               |                                                        |
|---------------|--------------------------------------------------------|
| Colour System | Variable CYM, Variable CTO, 5 Colour Wheel + 2 Filters |
| Control       | 8 bits / 16 bits                                       |


## Colors & Filters

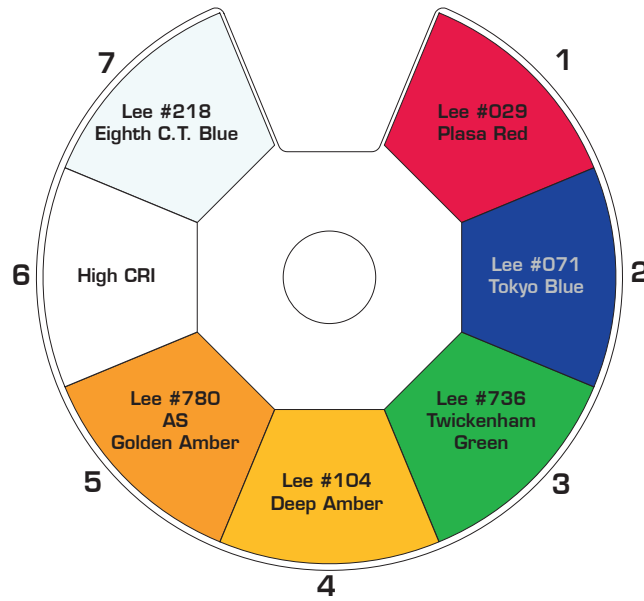


Magenta

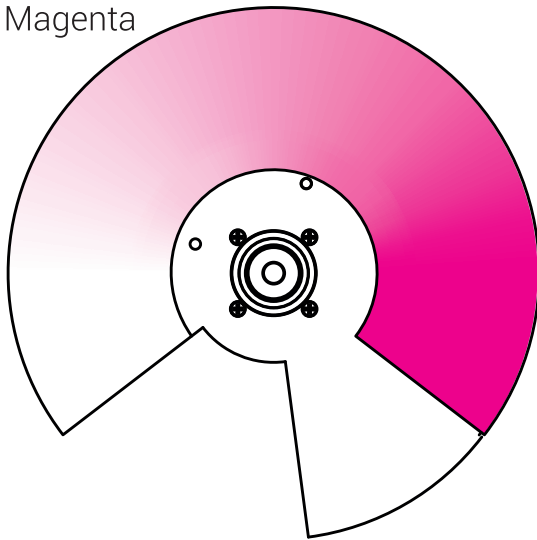


Cyan

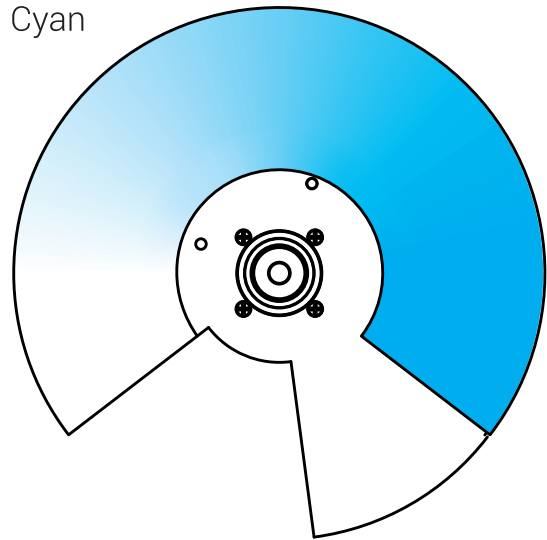

Yellow


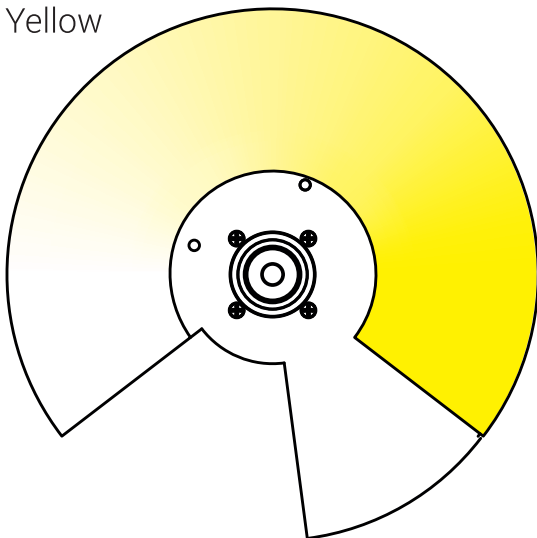


CTO


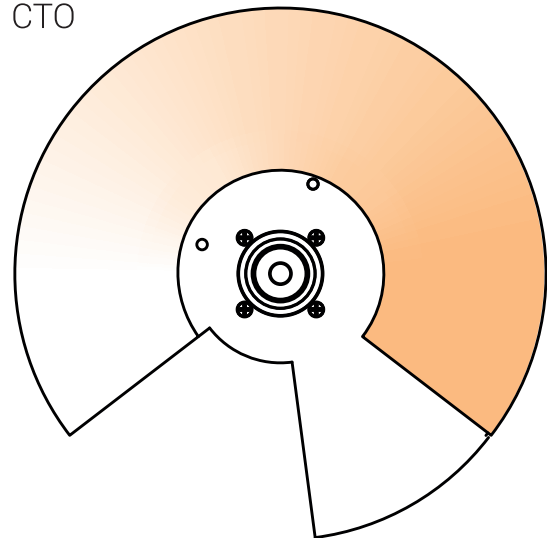






## Photometric Data - Narrow Zoom

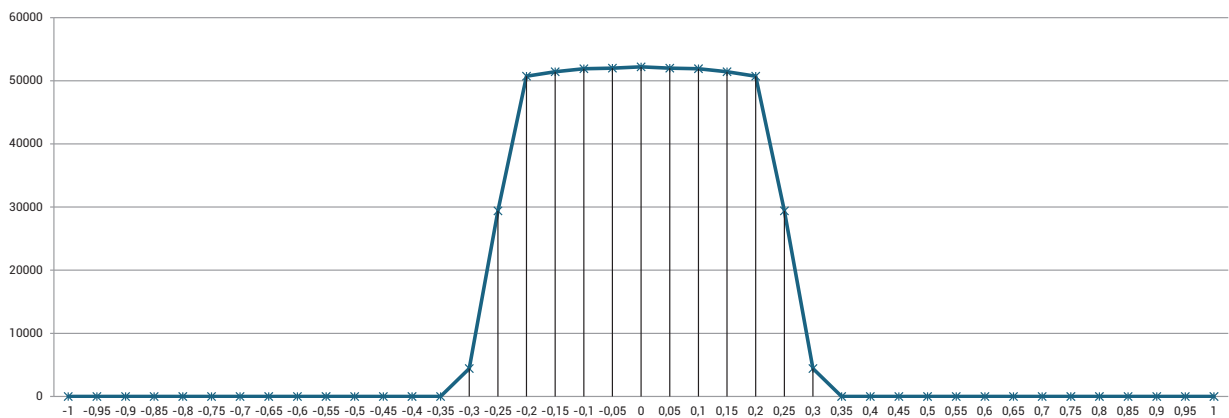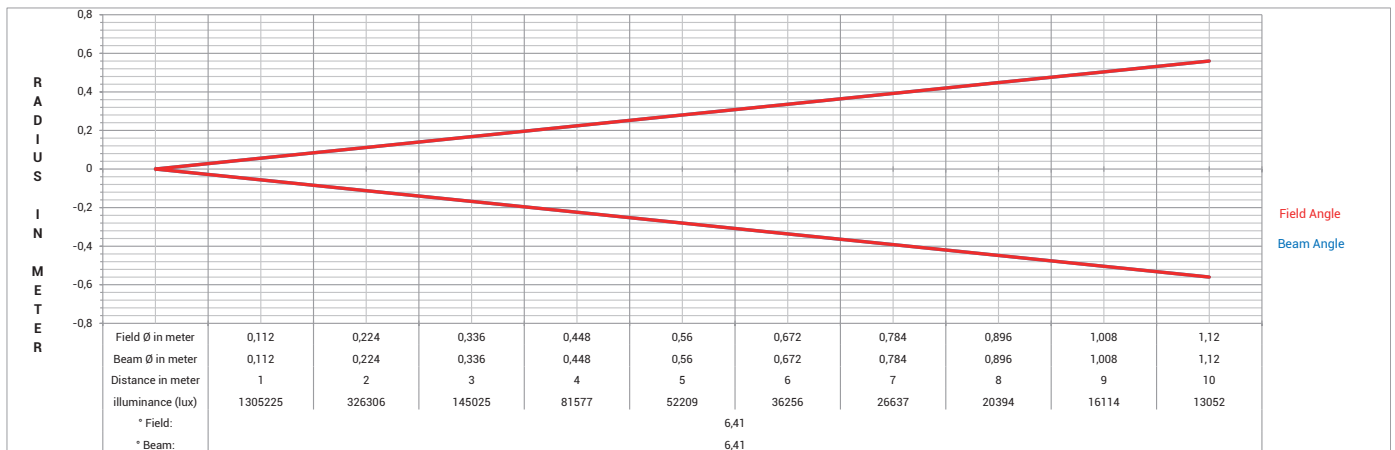

## Photometric Data - Medium Zoom

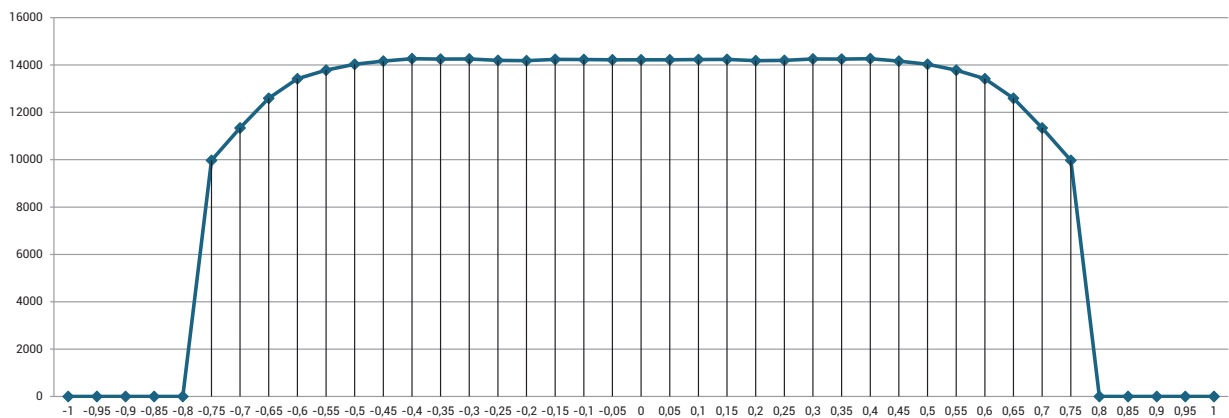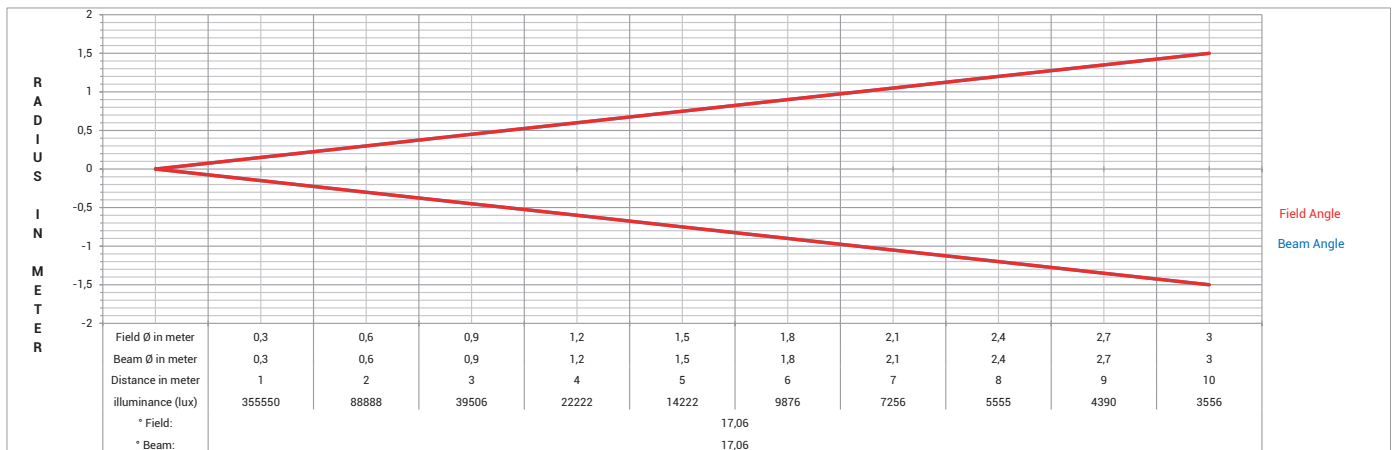

## Photometric Data - Wide Zoom

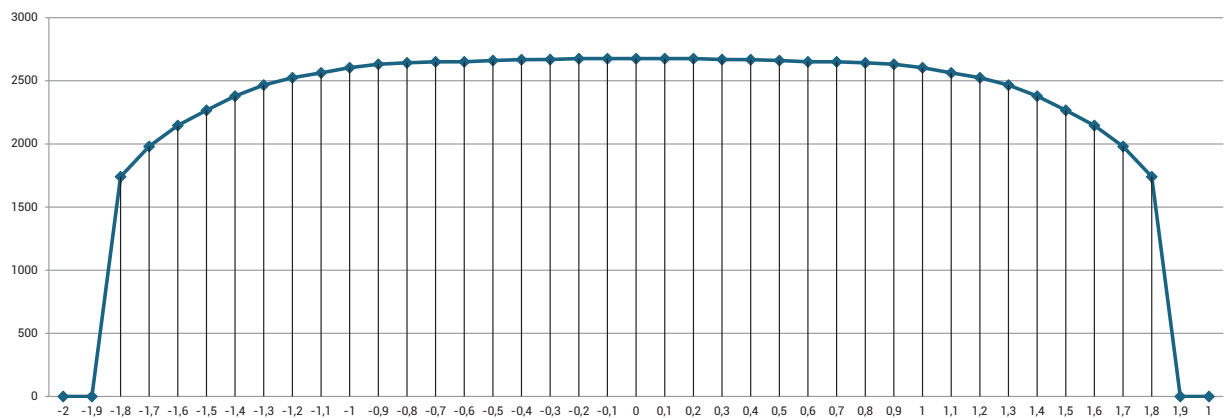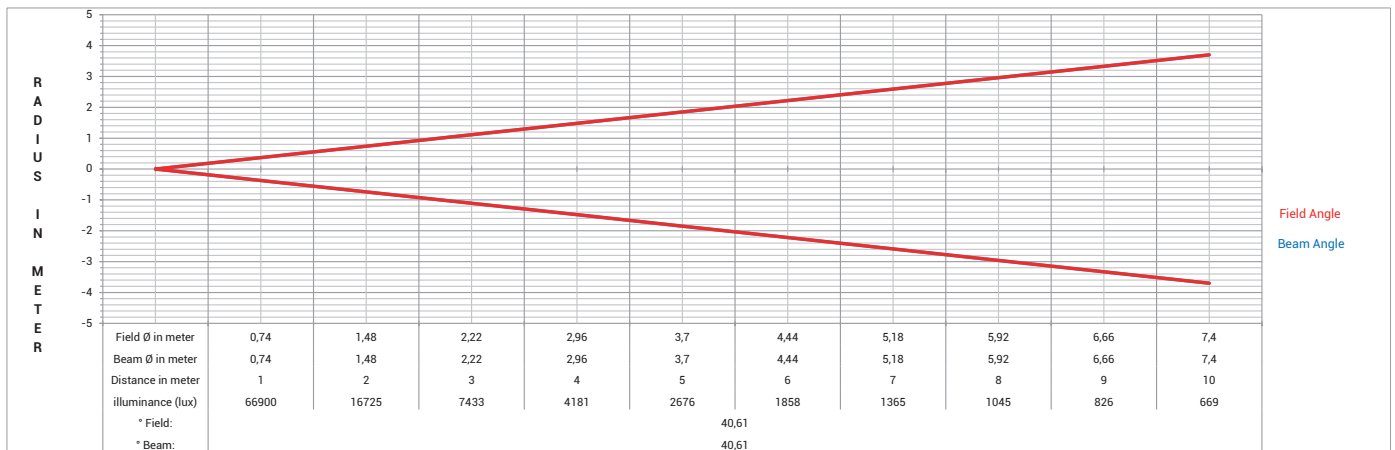

## White Spectrum Test Report

Medium Zoom @ 5m

**UPRtek**  
United Power Research Technology Corporation


### Information

|                            |                        |
|----------------------------|------------------------|
| User : R&D department      | Measure Time :14:37:21 |
| Model NO. : MK350S PREMIUM | Light Source :ENZO     |
| Memo :                     |                        |



### BASIC

|        |          |
|--------|----------|
| I-Time | : 460 us |
| x      | : 0,3133 |
| y      | : 0,3251 |
| CCT    | : 6503   |
| LUX    | : 13363  |



### Spectrum

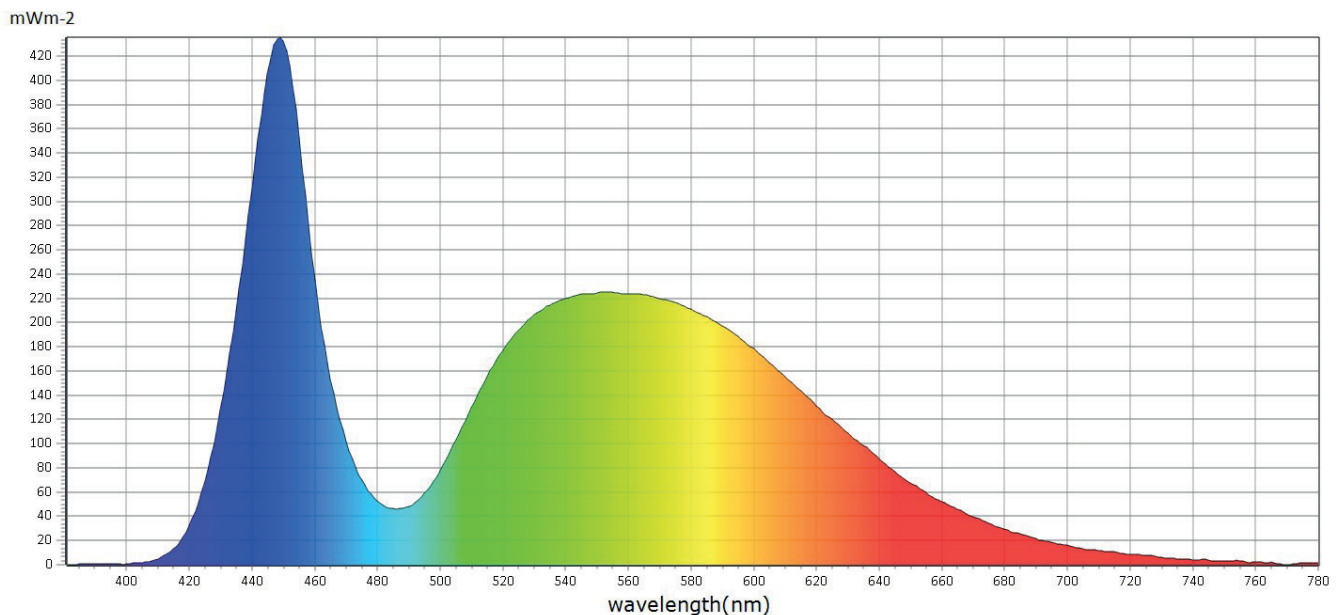

### CIE1931



### CIE1976

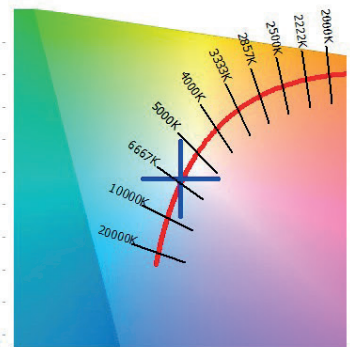

## White Spectrum Test Report

Medium Zoom @ 5m

**UPRtek**  
United Power Research Technology Corporation


### Information

User : R&D department  
Measure Time :14:37:21  
Model NO. : MK350S PREMIUM  
Light Source :ENZO  
Memo :


### BASIC

I-Time : 460 us  
X : 0,3133  
Y : 0,3251  
CCT : 6503  
LUX : 13363


### CRI: 71,71

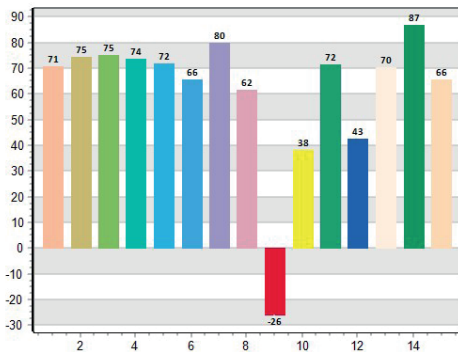


### CQS: 70,04

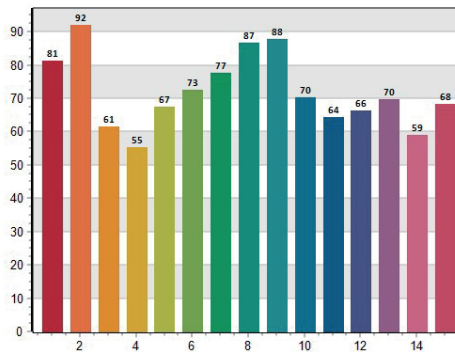


### CRI-2

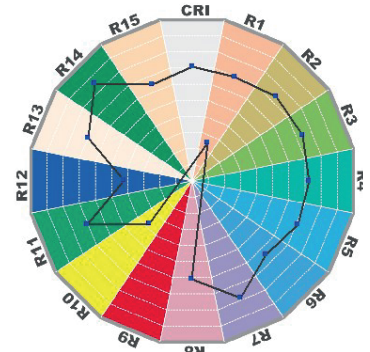

### TM30: 71,60

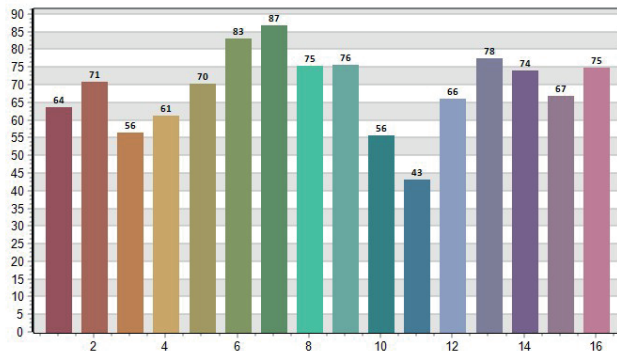

### TLCI: 47,06

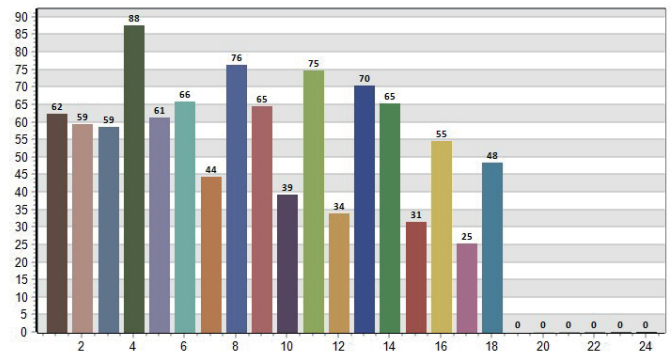

CRI values, only R1-R8 are used to calculate final CRI

| R1   | R2   | R3   | R4   | R5   | R6   | R7   | R8   | R9    | R10  | R11  | R12  | R13  | R14  | R15  |
|------|------|------|------|------|------|------|------|-------|------|------|------|------|------|------|
| 70,9 | 74,6 | 75,2 | 73,7 | 72,0 | 65,5 | 80,0 | 61,7 | -25,8 | 38,3 | 71,6 | 42,7 | 70,5 | 86,9 | 65,5 |

TM30 C values, 16 binned values out of total of 99 C values

| C1   | C2   | C3   | C4   | C5   | C6   | C7   | C8   | C9   | C10  | C11  | C12  | C13  | C14  | C15  | C16  |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 63,6 | 70,8 | 56,3 | 61,2 | 70,2 | 83,0 | 86,8 | 75,4 | 75,6 | 55,8 | 43,2 | 66,1 | 77,5 | 73,9 | 66,9 | 74,8 |

CQS Q values

| Q1   | Q2   | Q3   | Q4   | Q5   | Q6   | Q7   | Q8   | Q9   | Q10  | Q11  | Q12  | Q13  | Q14  | Q15  |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 81,3 | 92,0 | 61,5 | 55,2 | 67,5 | 72,5 | 77,5 | 86,7 | 87,7 | 70,1 | 64,3 | 66,2 | 69,8 | 58,9 | 68,3 |

## High CRI Filter Spectrum Test Report

Slot #6

Medium Zoom @ 5m

**UPRtek**  
United Power Research Technology Corporation


### Information

|                            |                        |
|----------------------------|------------------------|
| User : R&D department      | Measure Time :14:46:43 |
| Model NO. : MK350S PREMIUM | Light Source :ENZO     |
| Memo :                     |                        |



### BASIC

|        |          |
|--------|----------|
| I-Time | : 830 us |
| x      | : 0,3236 |
| y      | : 0,3211 |
| CCT    | : 5957   |
| LUX    | : 9020   |



### Spectrum

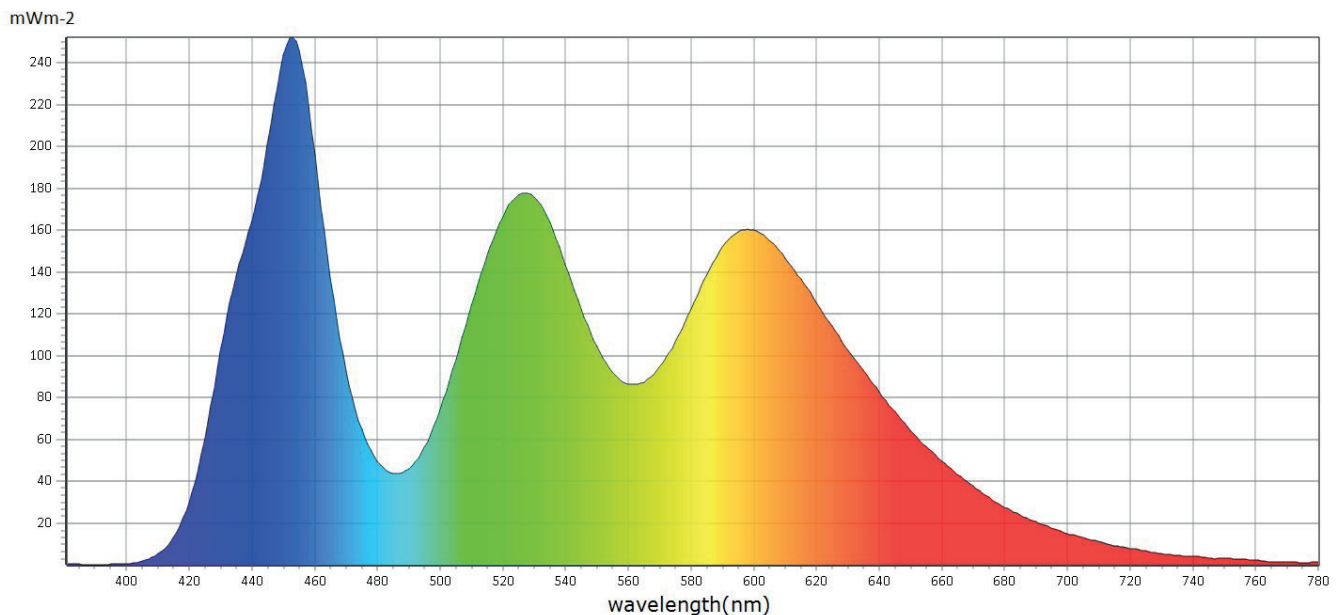

### CIE1931

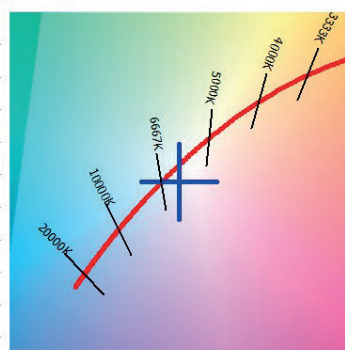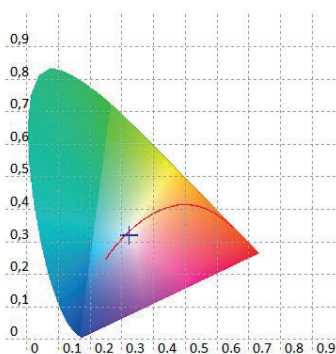

### CIE1976

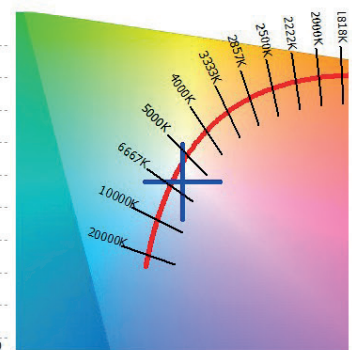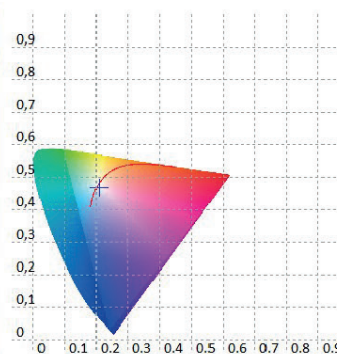



## High CRI Filter Spectrum Test Report

Slot #6

Medium Zoom @ 5m

## Information

User : R&D department Measure Time :14:46:43

Model NO. : MK350S PREMIUM Light Source :ENZO

Memo :

## BASIC

I-Time : 830 us

X : 0,3236

Y : 0,3211




CCT : 5957

LUX : 9020

CRI: 90,66



CQS: 89,16

CRI-2

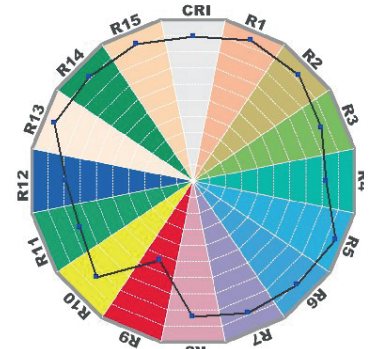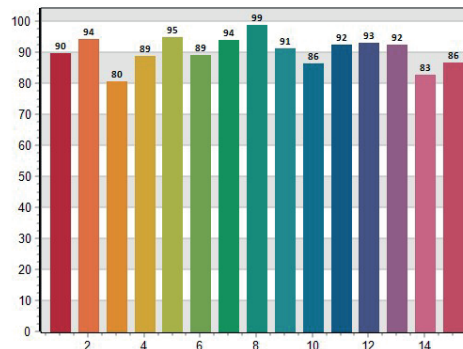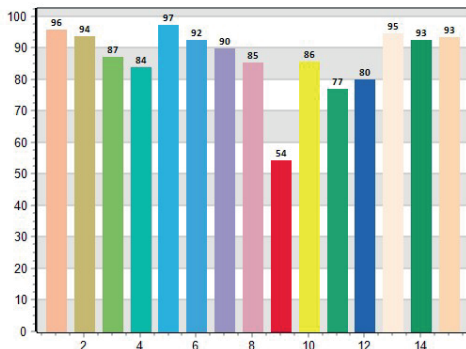

TM30: 87,48

TLCI: 73,19

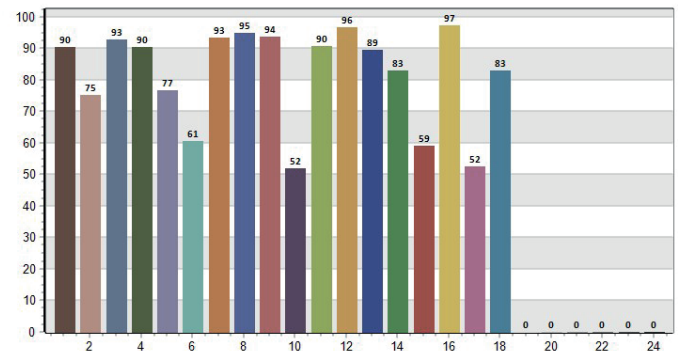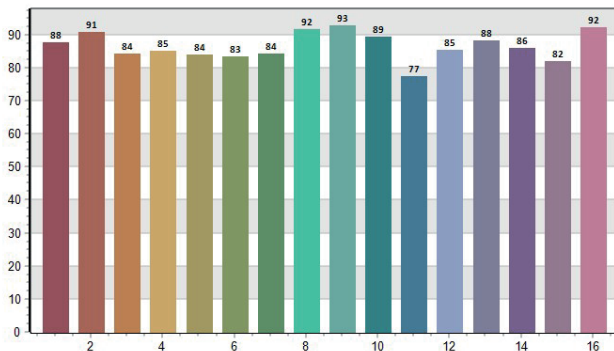

CRI values, only R1-R8 are used to calculate final CRI

| R1   | R2   | R3   | R4   | R5   | R6   | R7   | R8   | R9   | R10  | R11  | R12  | R13  | R14  | R15  |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 95,8 | 93,8 | 87,2 | 83,7 | 97,2 | 92,4 | 89,8 | 85,4 | 54,2 | 85,7 | 77,1 | 79,9 | 94,6 | 92,6 | 93,4 |

TM30 C values, 16 binned values out of total of 99 C values

| C1   | C2   | C3   | C4   | C5   | C6   | C7   | C8   | C9   | C10  | C11  | C12  | C13  | C14  | C15  | C16  |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 87,6 | 90,7 | 84,1 | 85,1 | 83,9 | 83,4 | 84,2 | 91,5 | 92,7 | 89,3 | 77,4 | 85,3 | 88,1 | 85,8 | 82,0 | 92,2 |

CQS Q values

| Q1   | Q2   | Q3   | Q4   | Q5   | Q6   | Q7   | Q8   | Q9   | Q10  | Q11  | Q12  | Q13  | Q14  | Q15  |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 89,7 | 94,0 | 80,5 | 88,8 | 94,9 | 89,0 | 93,7 | 98,7 | 91,0 | 86,1 | 92,2 | 92,9 | 92,5 | 82,7 | 86,5 |



## Eighth CTB (Lee #218) Filter Spectrum Test Report

Slot #7

Medium Zoom @ 5m

**UPRtek**  
United Power Research Technology Corporation


### Information

|                            |                        |
|----------------------------|------------------------|
| User : R&D department      | Measure Time :14:47:09 |
| Model NO. : MK350S PREMIUM | Light Source :ENZO     |
| Memo :                     |                        |



### BASIC

|        |          |
|--------|----------|
| I-Time | : 600 us |
| x      | : 0,2926 |
| y      | : 0,3041 |
| CCT    | : 8222   |
| LUX    | : 8865   |



### Spectrum

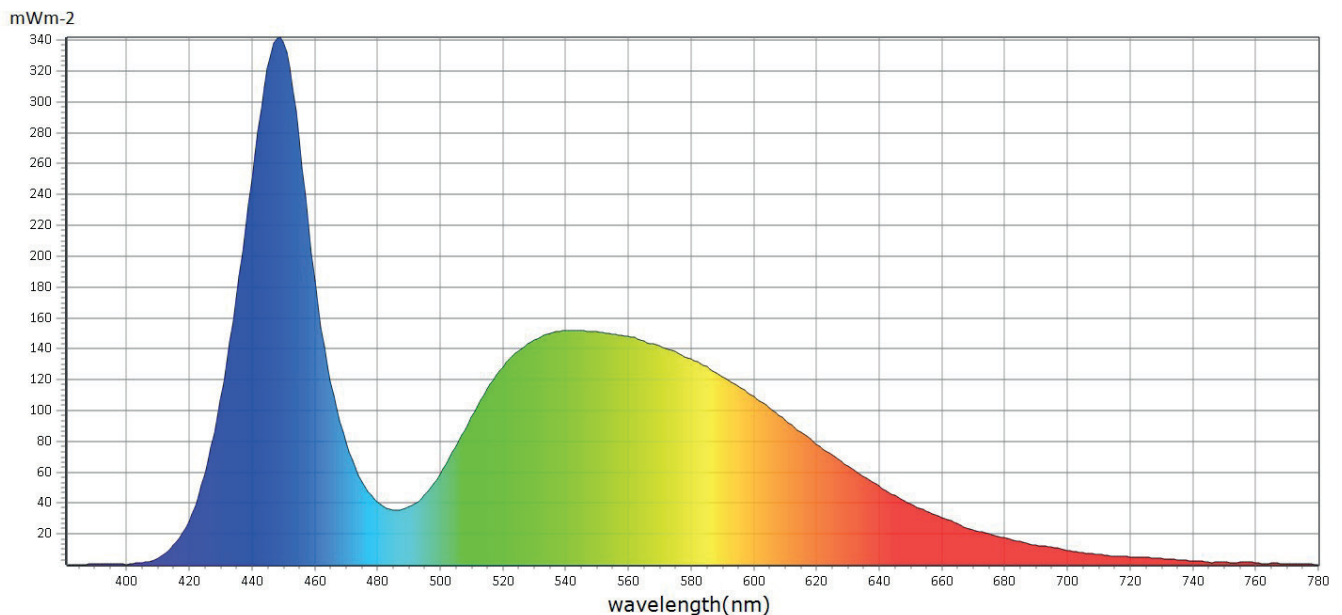

### CIE1931

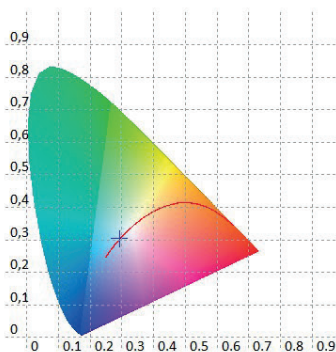

### CIE1976

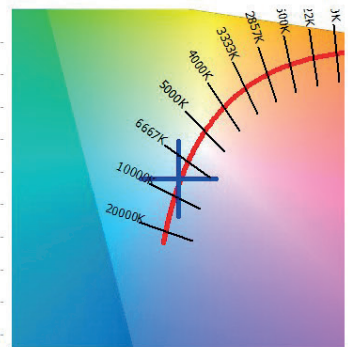

## Eighth CTB (Lee #218) Filter Spectrum Test Report

Slot #7

Medium Zoom @ 5m




### Information

User : R&D department  
Measure Time :14:47:09  
Model NO. : MK350S PREMIUM  
Light Source :ENZO  
Memo :


### BASIC

I-Time : 600 us  
X : 0,2926  
Y : 0,3041  
CCT : 8222  
LUX : 8865


### CRI: 71,94

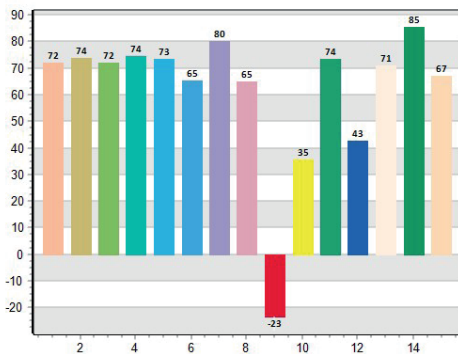


### CQS: 70,47

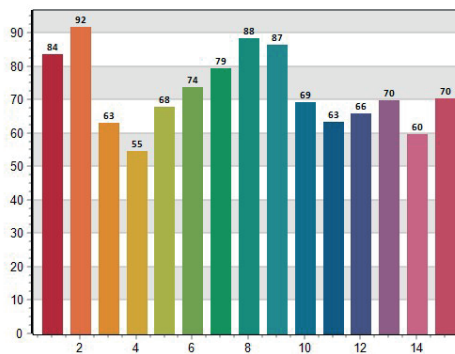


### CRI-2

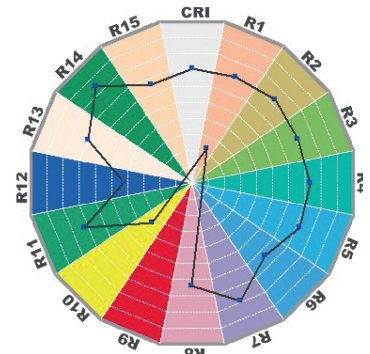

### TM30: 71,41

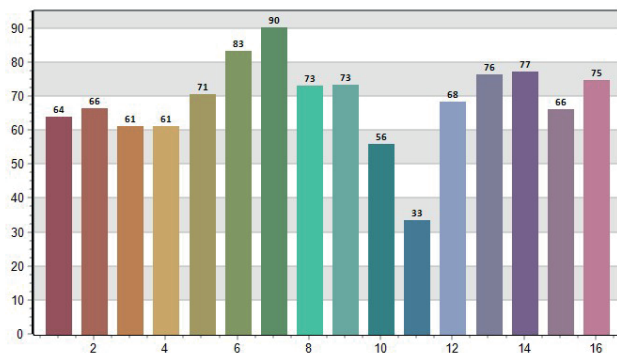

### TLCI: 48,62

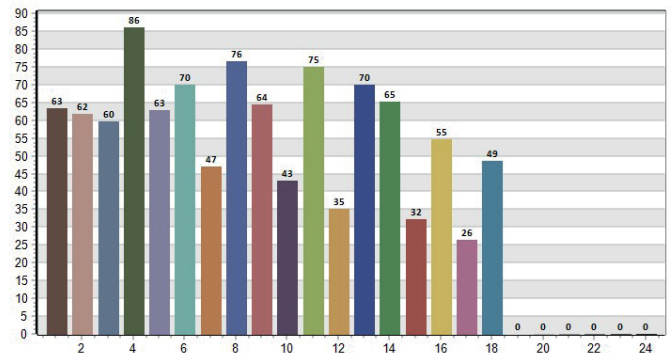

CRI values, only R1-R8 are used to calculate final CRI

| R1   | R2   | R3   | R4   | R5   | R6   | R7   | R8   | R9    | R10  | R11  | R12  | R13  | R14  | R15  |
|------|------|------|------|------|------|------|------|-------|------|------|------|------|------|------|
| 71,9 | 73,7 | 72,1 | 74,5 | 73,3 | 65,2 | 80,1 | 64,8 | -23,4 | 35,5 | 73,5 | 42,7 | 71,1 | 85,4 | 66,9 |

TM30 C values, 16 binned values out of total of 99 C values

| C1   | C2   | C3   | C4   | C5   | C6   | C7   | C8   | C9   | C10  | C11  | C12  | C13  | C14  | C15  | C16  |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 63,9 | 66,4 | 61,1 | 61,1 | 70,6 | 83,2 | 90,1 | 73,1 | 73,1 | 55,9 | 33,4 | 68,4 | 76,3 | 77,1 | 66,0 | 74,7 |

CQS Q values

| Q1   | Q2   | Q3   | Q4   | Q5   | Q6   | Q7   | Q8   | Q9   | Q10  | Q11  | Q12  | Q13  | Q14  | Q15  |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 83,8 | 91,8 | 63,0 | 54,7 | 67,9 | 73,9 | 79,4 | 88,3 | 86,5 | 69,3 | 63,2 | 65,8 | 69,9 | 59,7 | 70,3 |

## CTO @100% Spectrum Test Report

Medium Zoom @ 5m

**UPRtek**  
United Power Research Technology Corporation


### Information

|                            |                        |
|----------------------------|------------------------|
| User : R&D department      | Measure Time :14:43:26 |
| Model NO. : MK350S PREMIUM | Light Source :ENZO     |
| Memo :                     |                        |


### BASIC

|        |           |
|--------|-----------|
| I-Time | : 2400 us |
| x      | : 0,4396  |
| y      | : 0,4024  |
| CCT    | : 2941    |
| LUX    | : 4599    |


### Spectrum

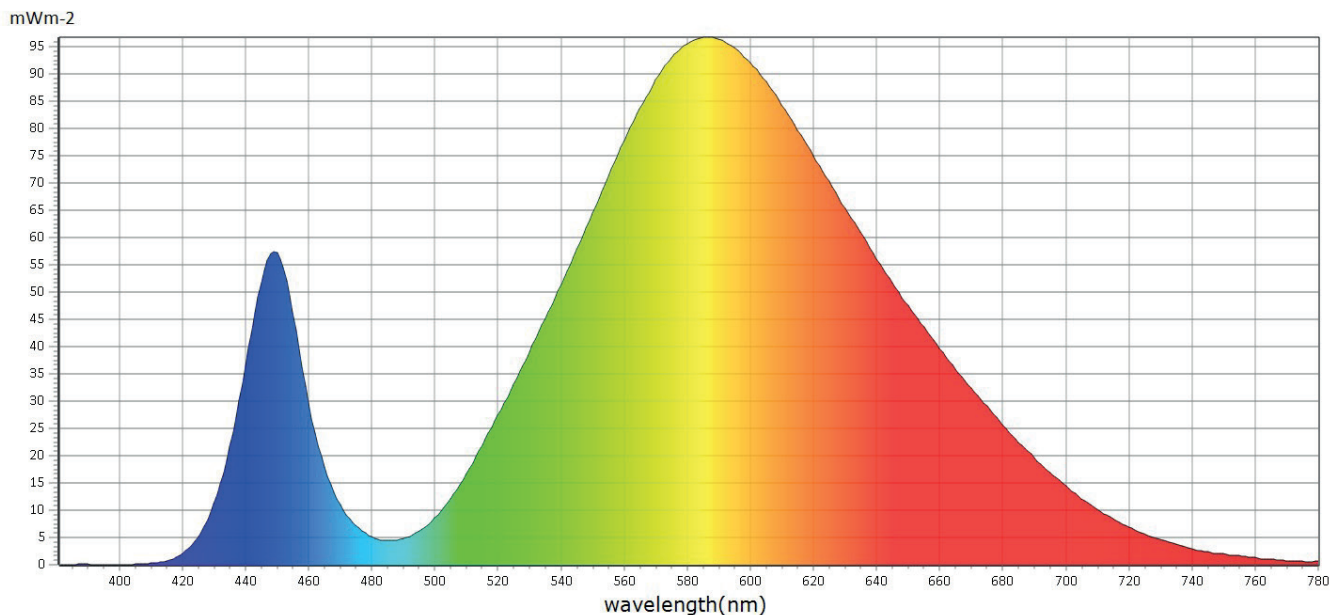

### CIE1931



### CIE1976

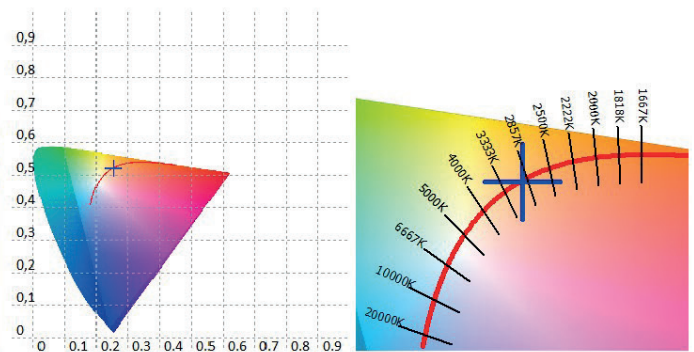

## CTO @100% Spectrum Test Report

Medium Zoom @ 5m

## Information

User : R&amp;D department

Measure Time :14:43:26

Model NO. : MK350S PREMIUM

Light Source :ENZO

Memo :

## BASIC

I-Time : 2400 us


X : 0,4396

Y : 0,4024


CCT : 2941

LUX : 4599


## CRI: 63,24

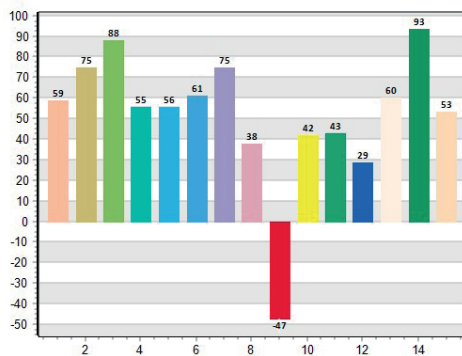


## CQS: 63,26

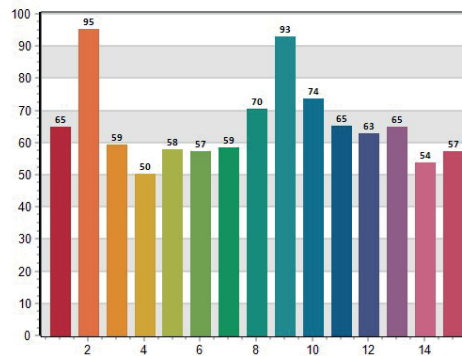


## CRI-2

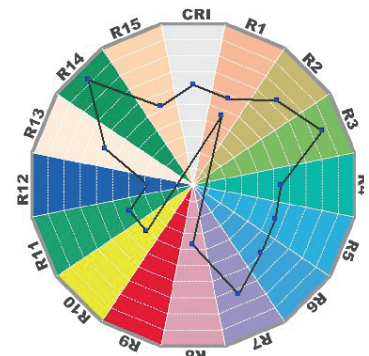

## TM30: 65,52

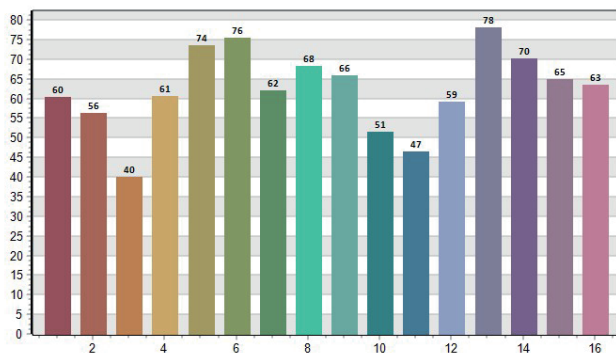

## TLCI: 31,48

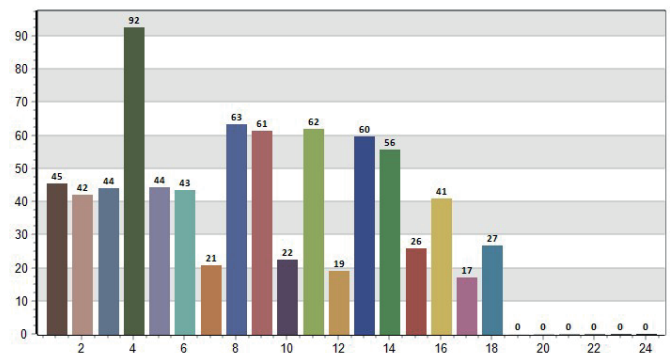

CRI values, only R1-R8 are used to calculate final CRI

| R1   | R2   | R3   | R4   | R5   | R6   | R7   | R8   | R9    | R10  | R11  | R12  | R13  | R14  | R15  |
|------|------|------|------|------|------|------|------|-------|------|------|------|------|------|------|
| 58,7 | 74,6 | 88,2 | 55,4 | 55,7 | 60,8 | 74,8 | 37,7 | -47,3 | 41,8 | 42,9 | 28,6 | 60,0 | 93,4 | 53,3 |

TM30 C values, 16 binned values out of total of 99 C values

| C1   | C2   | C3   | C4   | C5   | C6   | C7   | C8   | C9   | C10  | C11  | C12  | C13  | C14  | C15  | C16  |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 60,3 | 56,3 | 40,0 | 60,5 | 73,6 | 75,6 | 62,1 | 68,3 | 66,0 | 51,4 | 46,5 | 59,1 | 78,1 | 70,2 | 64,9 | 63,5 |

CQS Q values

| Q1   | Q2   | Q3   | Q4   | Q5   | Q6   | Q7   | Q8   | Q9   | Q10  | Q11  | Q12  | Q13  | Q14  | Q15  |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 64,8 | 95,4 | 59,2 | 50,3 | 57,8 | 57,3 | 58,5 | 70,4 | 92,9 | 73,7 | 65,1 | 63,0 | 64,9 | 53,7 | 57,3 |



## CTO @100% + High CRI Filter Spectrum Test Report

Slot #6

Medium Zoom @ 5m

**UPRtek**  
United Power Research Technology Corporation


### Information

|                            |                        |
|----------------------------|------------------------|
| User :                     | Measure Time :16:41:35 |
| Model NO. : MK350S PREMIUM | Light Source :         |
| Memo :                     |                        |



### BASIC

|     |          |
|-----|----------|
| CRI | : 76,7   |
| x   | : 0,4587 |
| y   | : 0,3844 |
| CCT | : 2506   |
| LUX | : 3575   |



### Spectrum

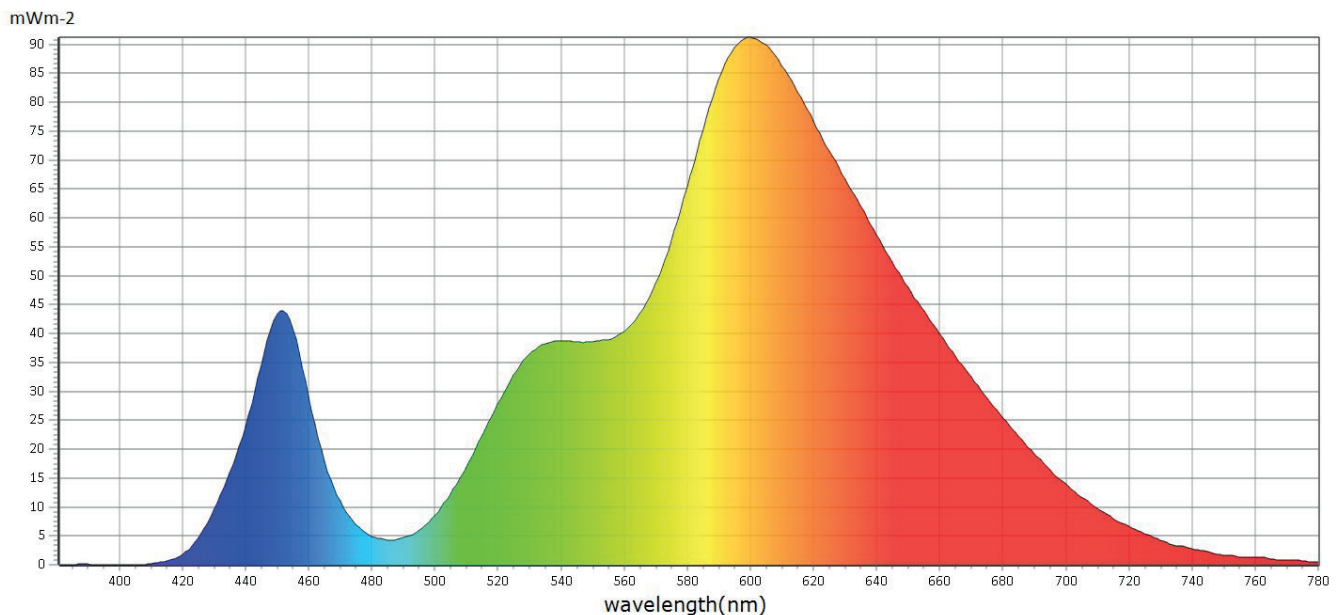

### CIE1931



### CIE1976

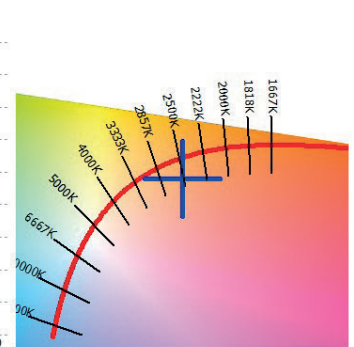

## CTO @100% + High CRI Filter Spectrum Test Report

Slot #6

Medium Zoom @ 5m

**UPRtek**  
United Power Research Technology Corporation


### Information

|                            |                        |
|----------------------------|------------------------|
| User :                     | Measure Time :16:41:35 |
| Model NO. : MK350S PREMIUM | Light Source :         |
| Memo :                     |                        |


### BASIC

|     |          |
|-----|----------|
| CRI | : 76,7   |
| X   | : 0,4587 |
| Y   | : 0,3844 |
| CCT | : 2506   |
| LUX | : 3575   |


### CRI: 76,71

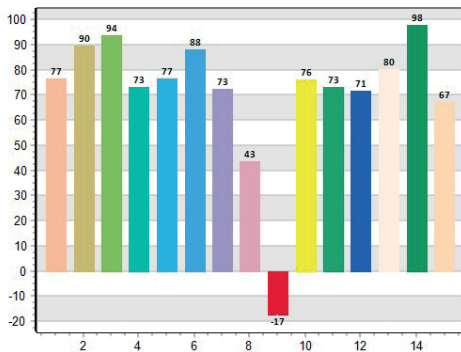


### CQS: 71,06

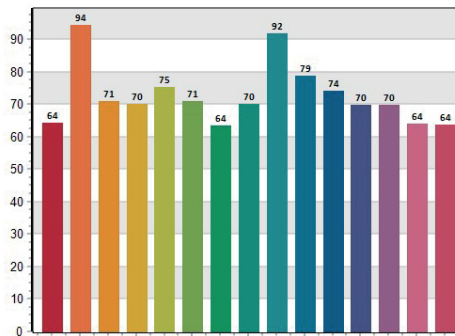


### CRI-2

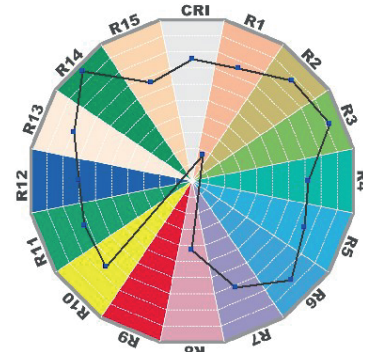

### TM30: 73,53

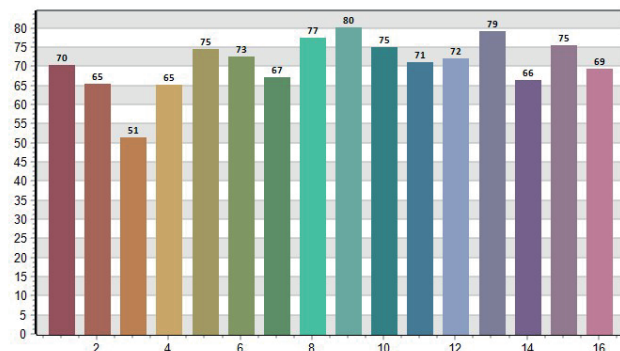

### TLCI: 40,48

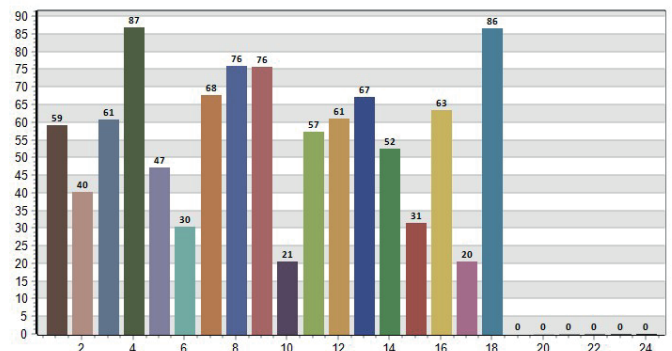

CRI values, only R1-R8 are used to calculate final CRI

| R1   | R2   | R3   | R4   | R5   | R6   | R7   | R8   | R9    | R10  | R11  | R12  | R13  | R14  | R15  |
|------|------|------|------|------|------|------|------|-------|------|------|------|------|------|------|
| 76,6 | 89,5 | 93,7 | 73,2 | 76,6 | 88,1 | 72,5 | 43,4 | -17,4 | 76,3 | 73,0 | 71,5 | 80,4 | 97,8 | 67,1 |

TM30 C values, 16 binned values out of total of 99 C values

| C1   | C2   | C3   | C4   | C5   | C6   | C7   | C8   | C9   | C10  | C11  | C12  | C13  | C14  | C15  | C16  |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 70,3 | 65,5 | 51,3 | 65,2 | 74,6 | 72,6 | 67,1 | 77,4 | 80,2 | 74,9 | 71,0 | 72,2 | 79,2 | 66,5 | 75,5 | 69,4 |

CQS Q values

| Q1   | Q2   | Q3   | Q4   | Q5   | Q6   | Q7   | Q8   | Q9   | Q10  | Q11  | Q12  | Q13  | Q14  | Q15  |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 64,3 | 94,4 | 70,8 | 70,0 | 75,2 | 70,9 | 63,5 | 70,0 | 91,8 | 78,8 | 74,1 | 69,7 | 69,8 | 64,1 | 63,6 |



## Cyan @100% Spectrum Test Report

Medium Zoom @ 5m

**UPRtek**  
United Power Research Technology Corporation


### Information

|                            |                        |
|----------------------------|------------------------|
| User : R&D department      | Measure Time :14:37:56 |
| Model NO. : MK350S PREMIUM | Light Source :ENZO     |
| Memo :                     |                        |


### BASIC

|        |          |
|--------|----------|
| I-Time | : 570 us |
| x      | : 0,1506 |
| y      | : 0,1537 |
| CCT    | : 0      |
| LUX    | : 2666   |


### Spectrum

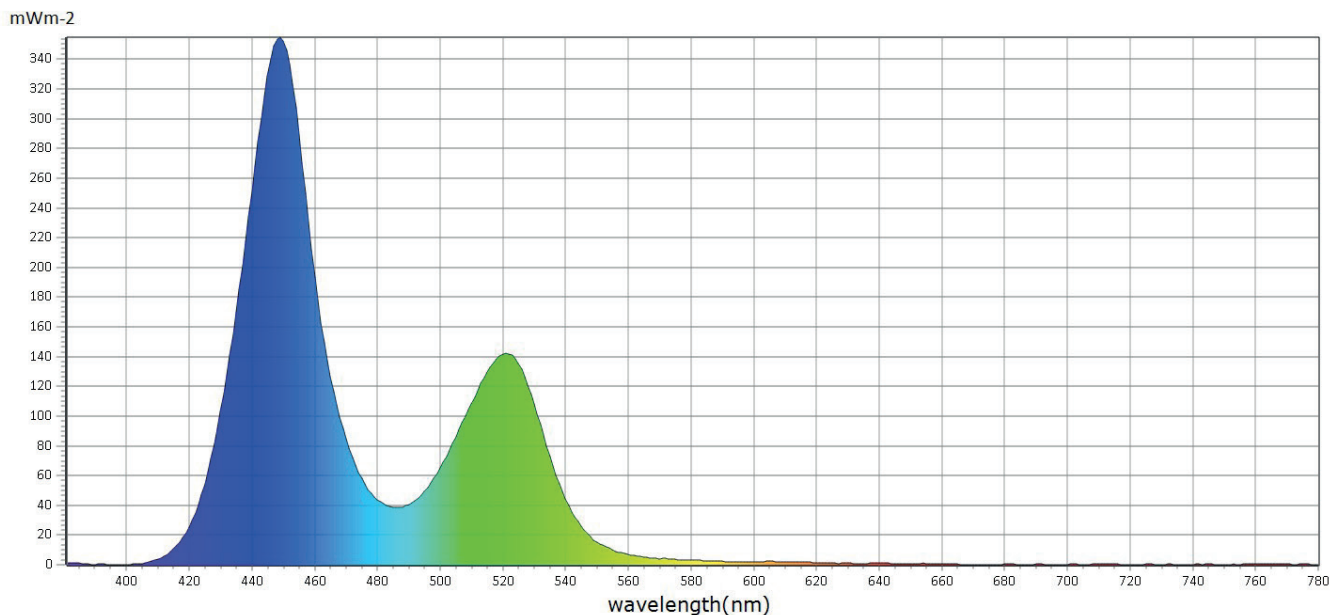

### CIE1931



### CIE1976



## Magenta @100% Spectrum Test Report

Medium Zoom @ 5m

**UPRtek**  
United Power Research Technology Corporation


### Information

|                            |                        |
|----------------------------|------------------------|
| User : R&D department      | Measure Time :14:38:53 |
| Model NO. : MK350S PREMIUM | Light Source :ENZO     |
| Memo :                     |                        |


### BASIC

|        |          |
|--------|----------|
| I-Time | : 860 us |
| x      | : 0,2419 |
| y      | : 0,0622 |
| CCT    | : 0      |
| LUX    | : 565,0  |


### Spectrum

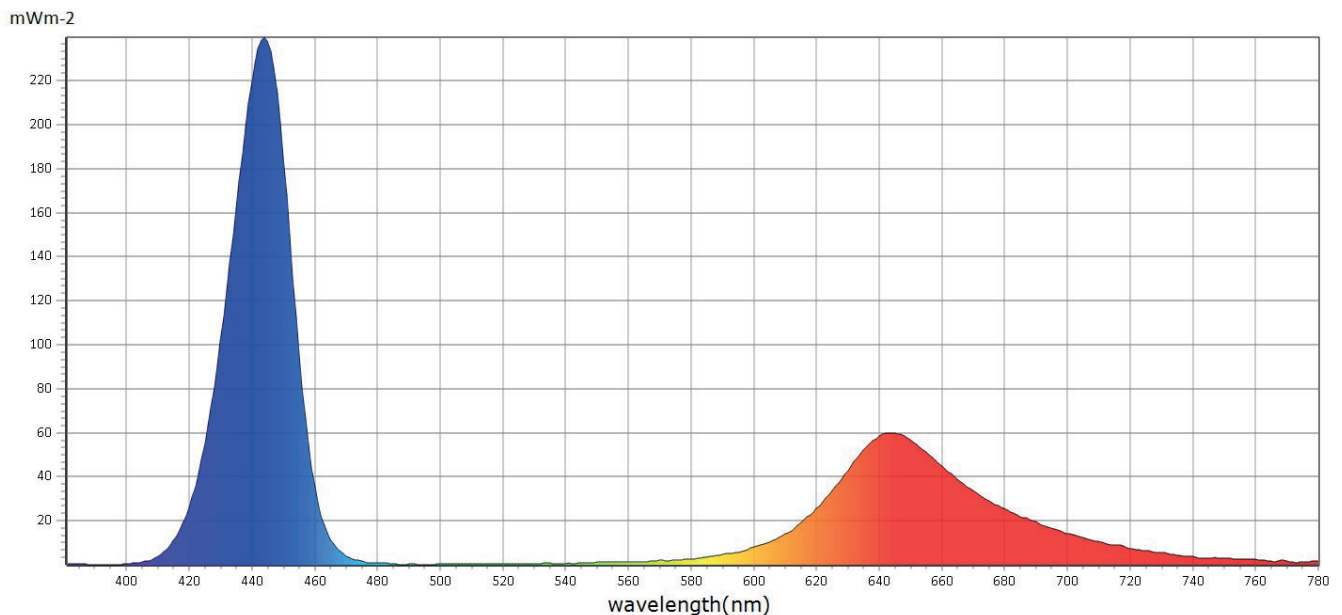

### CIE1931

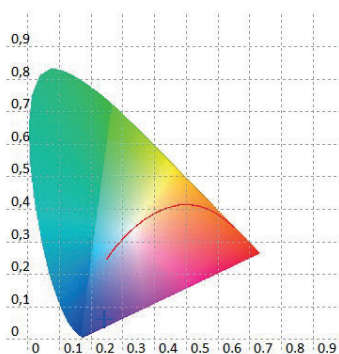

### CIE1976

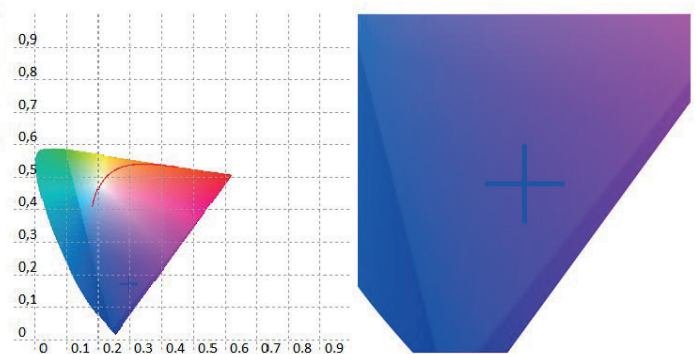

## Yellow @100% Spectrum Test Report

Medium Zoom @ 5m

**UPRtek**  
United Power Research Technology Corporation


### Information

|                            |                        |
|----------------------------|------------------------|
| User : R&D department      | Measure Time :14:39:48 |
| Model NO. : MK350S PREMIUM | Light Source :ENZO     |
| Memo :                     |                        |


### BASIC

|        |          |
|--------|----------|
| I-Time | : 900 us |
| x      | : 0,4568 |
| y      | : 0,5334 |
| CCT    | : 3522   |
| LUX    | : 10711  |


### Spectrum

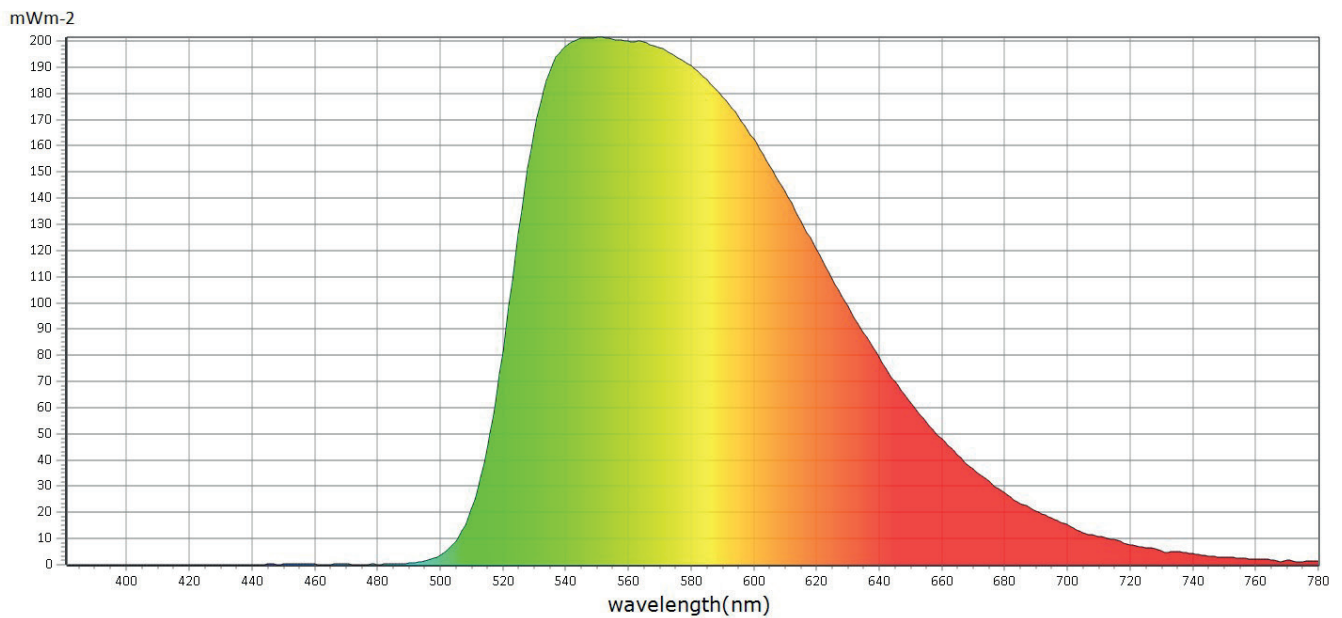

### CIE1931

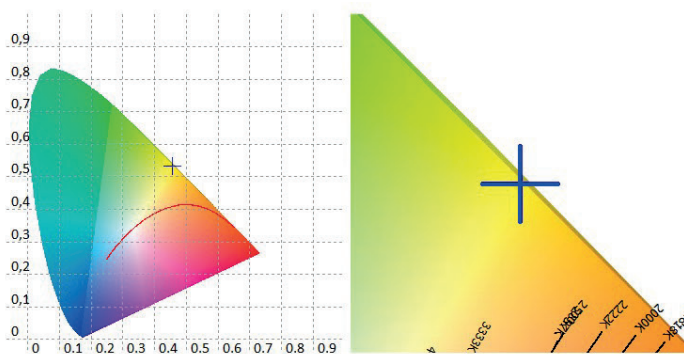

### CIE1976

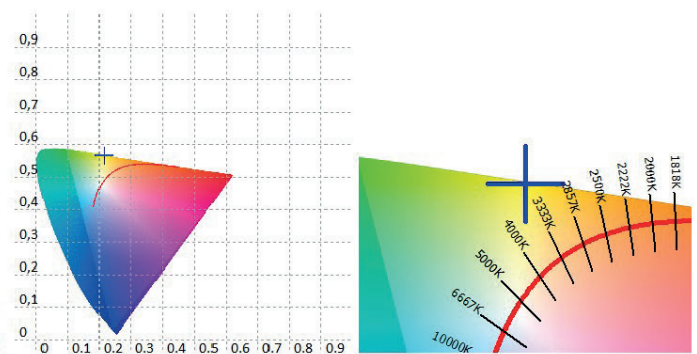

## Cyan+Magenta @100% Spectrum Test Report

Medium Zoom @ 5m

**UPRtek**  
United Power Research Technology Corporation


### Information

|                            |                        |
|----------------------------|------------------------|
| User : R&D department      | Measure Time :14:42:29 |
| Model NO. : MK350S PREMIUM | Light Source :ENZO     |
| Memo :                     |                        |


### BASIC

|        |           |
|--------|-----------|
| I-Time | : 1200 us |
| x      | : 0,1622  |
| y      | : 0,0160  |
| CCT    | : 0       |
| LUX    | : 103,4   |


### Spectrum

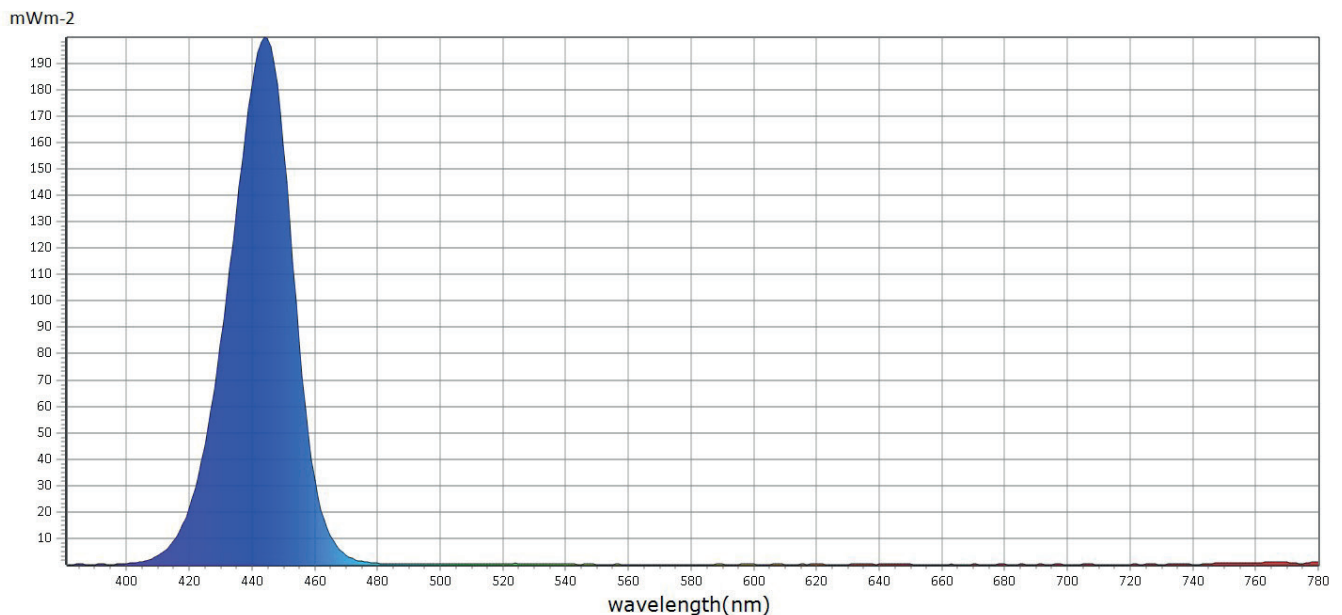

### CIE1931



### CIE1976





## Magenta+Yellow @100% Spectrum Test Report

Medium Zoom @ 5m

**UPRtek**  
United Power Research Technology Corporation


### Information

|                            |                        |
|----------------------------|------------------------|
| User : R&D department      | Measure Time :14:40:35 |
| Model NO. : MK350S PREMIUM | Light Source :ENZO     |
| Memo :                     |                        |


### BASIC

|        |           |
|--------|-----------|
| I-Time | : 4800 us |
| x      | : 0,6721  |
| y      | : 0,3237  |
| CCT    | : 0       |
| LUX    | : 416,0   |


### Spectrum

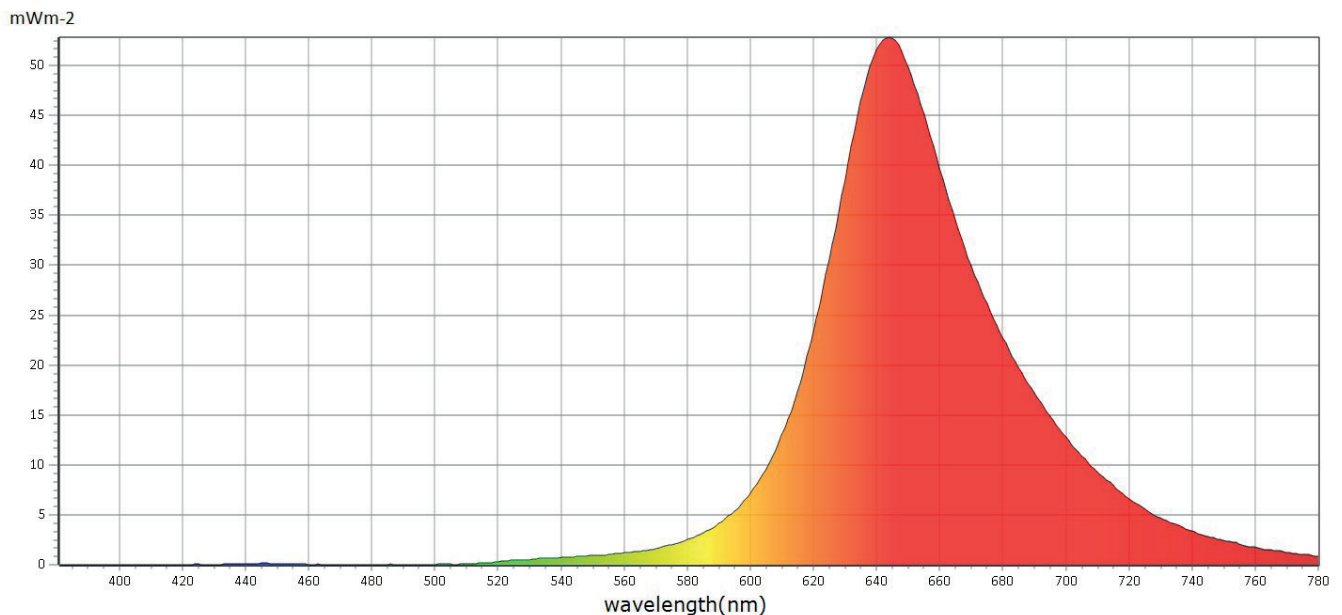

### CIE1931

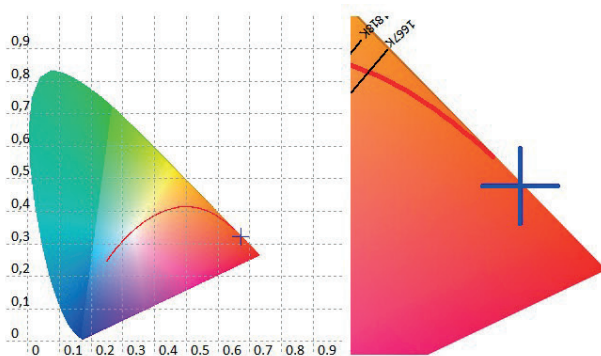

### CIE1976

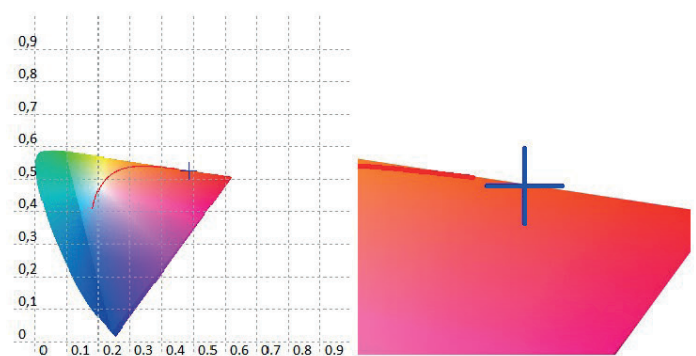



## Cyan+Yellow @100% Spectrum Test Report

Medium Zoom @ 5m

**UPRtek**  
United Power Research Technology Corporation


### Information

|                            |                        |
|----------------------------|------------------------|
| User : R&D department      | Measure Time :14:41:37 |
| Model NO. : MK350S PREMIUM | Light Source :ENZO     |
| Memo :                     |                        |


### BASIC

|        |           |
|--------|-----------|
| I-Time | : 2400 us |
| x      | : 0,1677  |
| y      | : 0,7670  |
| CCT    | : 7661    |
| LUX    | : 1267    |


### Spectrum

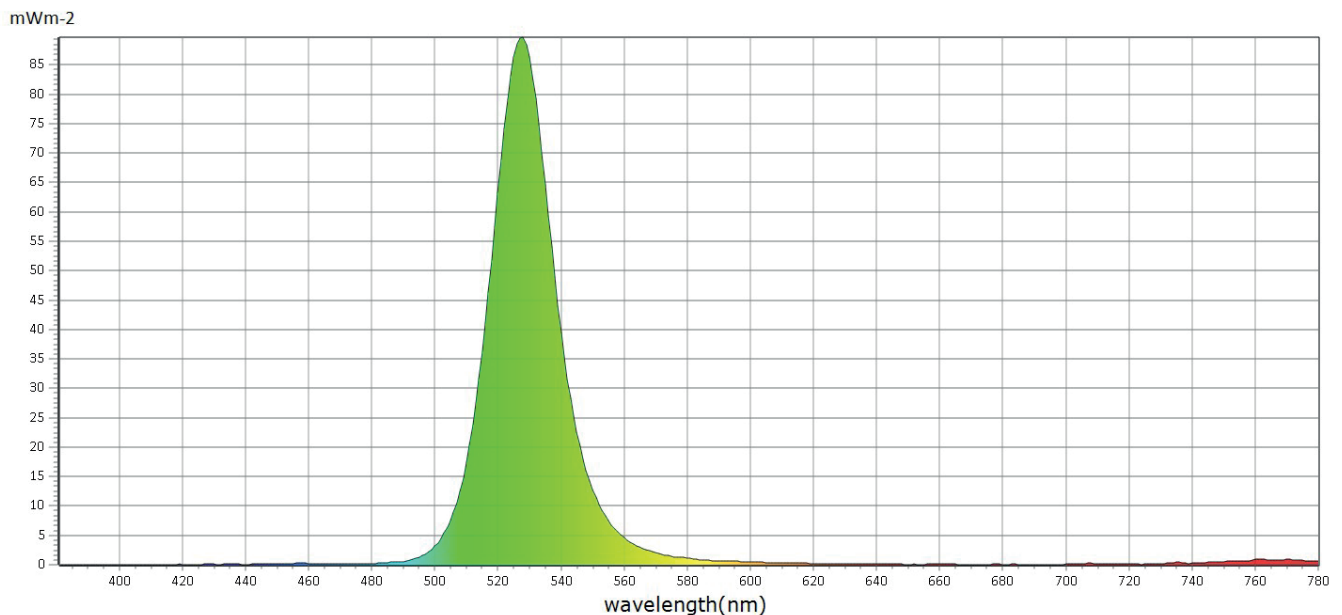

### CIE1931

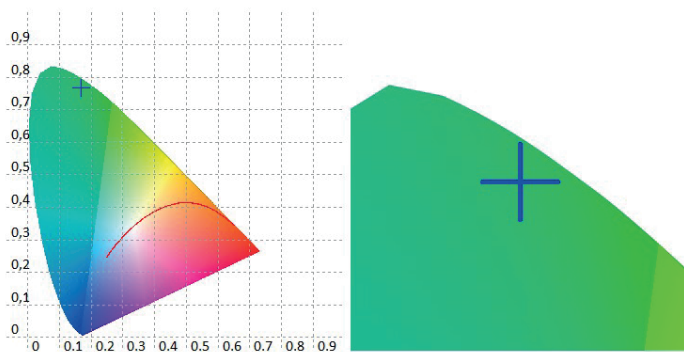

### CIE1976

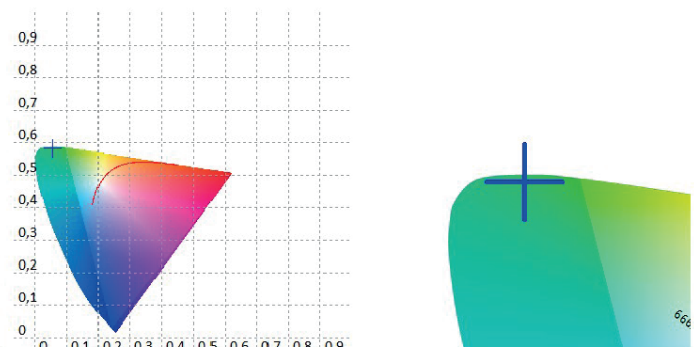

## Plasa Red (Lee #029) Filter Spectrum Test Report

Slot #1

Medium Zoom @ 5m

**UPRtek**  
United Power Research Technology Corporation


### Information

|                            |                        |
|----------------------------|------------------------|
| User : R&D department      | Measure Time :14:44:14 |
| Model NO. : MK350S PREMIUM | Light Source :ENZO     |
| Memo :                     |                        |


### BASIC

|        |           |
|--------|-----------|
| I-Time | : 2400 us |
| x      | : 0,6996  |
| y      | : 0,2938  |
| CCT    | : 0       |
| LUX    | : 496,1   |


### Spectrum

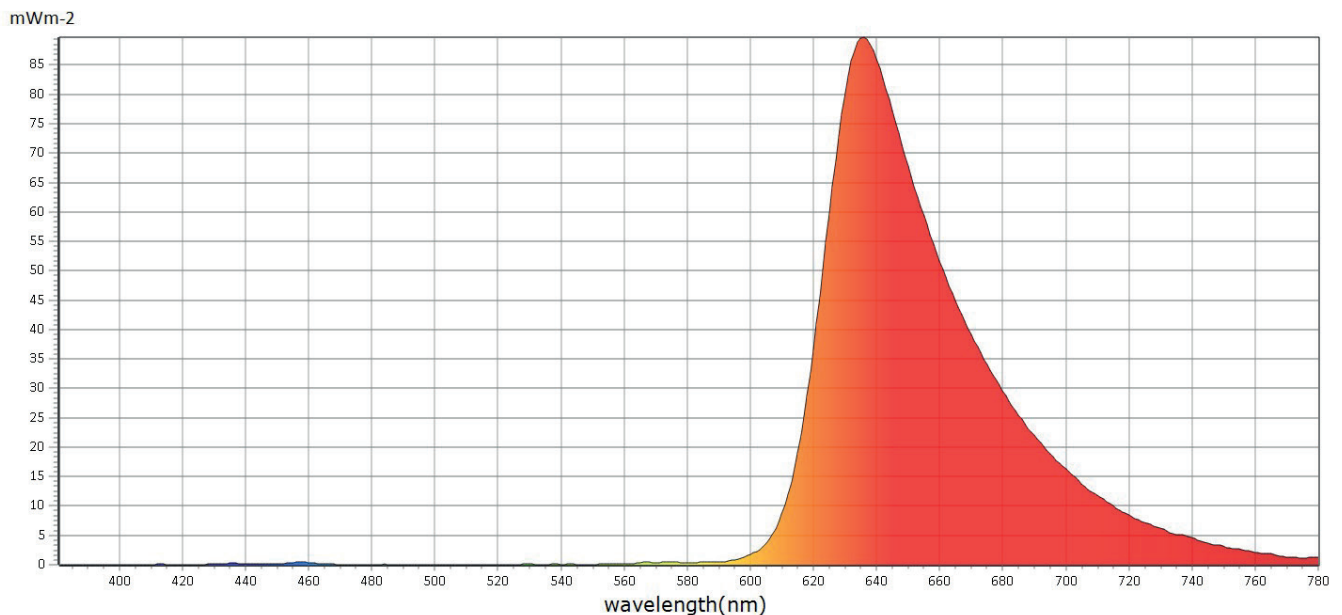

### CIE1931

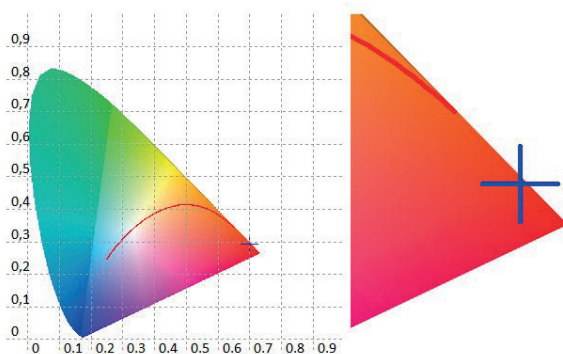

### CIE1976

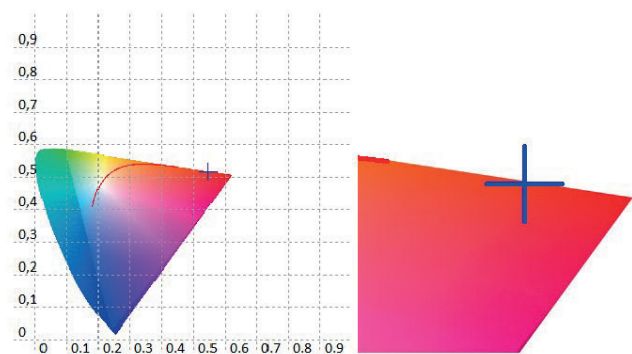

## Tokyo Blue (Lee #071) Filter Spectrum Test Report

Slot #2

Medium Zoom @ 5m

**UPRtek**  
United Power Research Technology Corporation


### Information

|                            |                        |
|----------------------------|------------------------|
| User : R&D department      | Measure Time :14:44:47 |
| Model NO. : MK350S PREMIUM | Light Source :ENZO     |
| Memo :                     |                        |


### BASIC

|        |          |
|--------|----------|
| I-Time | : 540 us |
| x      | : 0,1559 |
| y      | : 0,0340 |
| CCT    | : 0      |
| LUX    | : 542,3  |


### Spectrum

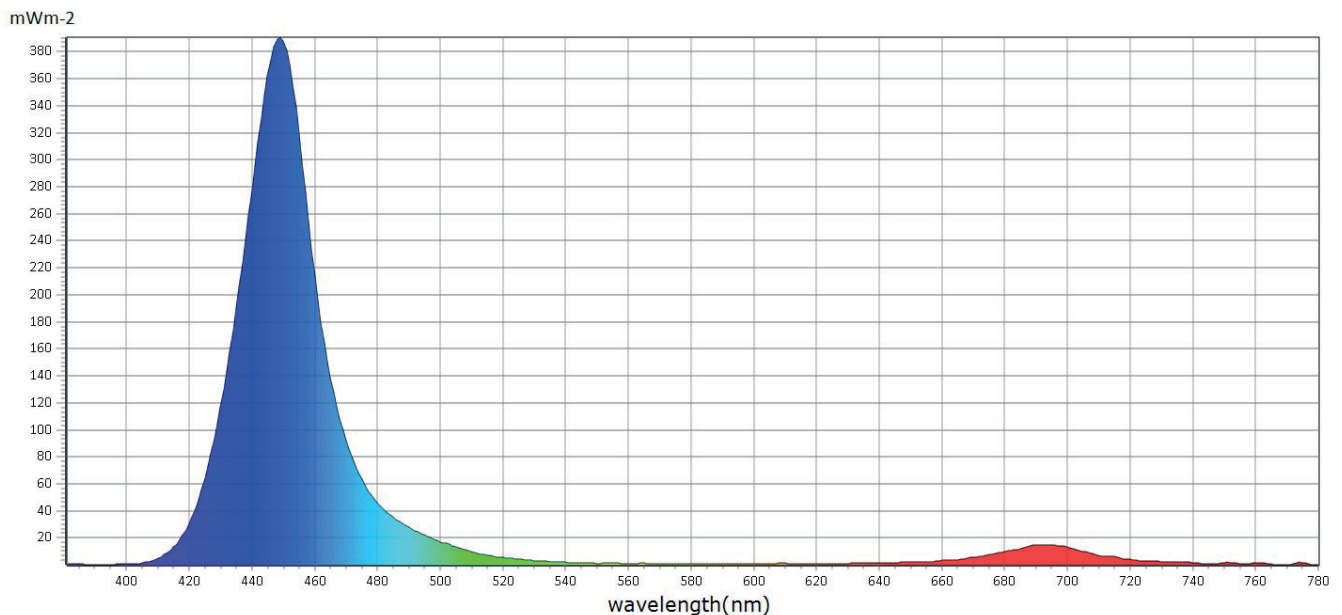

### CIE1931



### CIE1976



## Twickenham Green (Lee #736) Filter Spectrum Test Report

Slot #3

Medium Zoom @ 5m

**UPRtek**  
United Power Research Technology Corporation


### Information

|                            |                        |
|----------------------------|------------------------|
| User : R&D department      | Measure Time :14:45:10 |
| Model NO. : MK350S PREMIUM | Light Source :ENZO     |
| Memo :                     |                        |


### BASIC

|        |          |
|--------|----------|
| I-Time | : 940 us |
| x      | : 0,1746 |
| y      | : 0,7522 |
| CCT    | : 7621   |
| LUX    | : 3748   |


### Spectrum

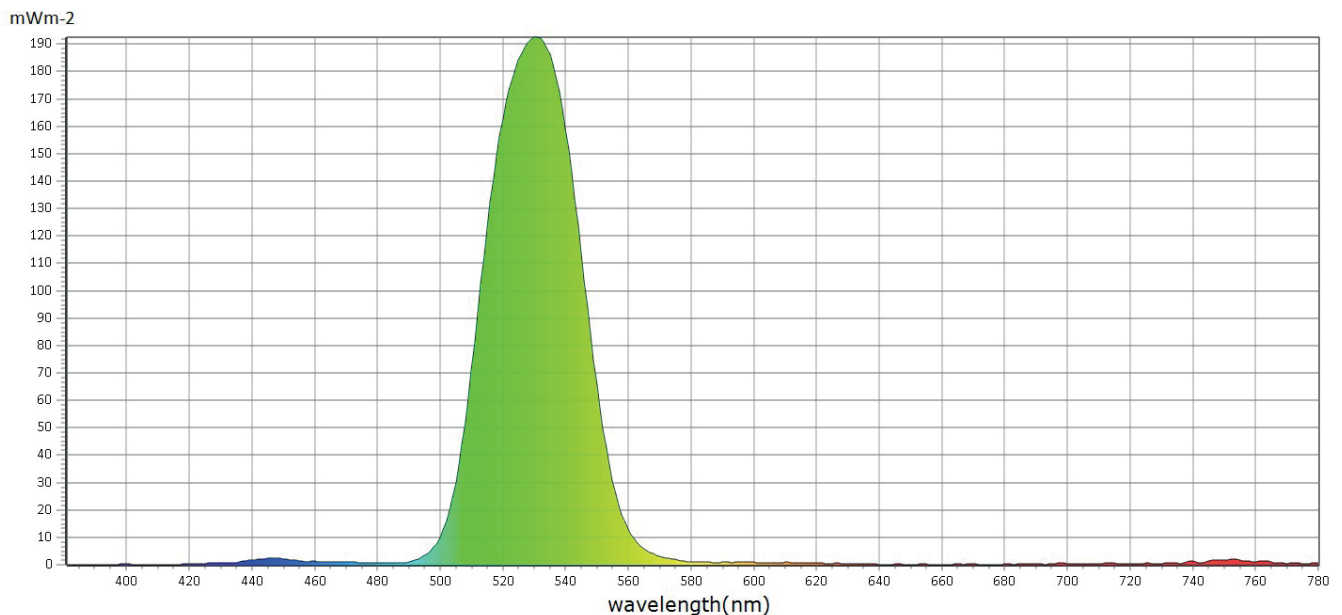

### CIE1931

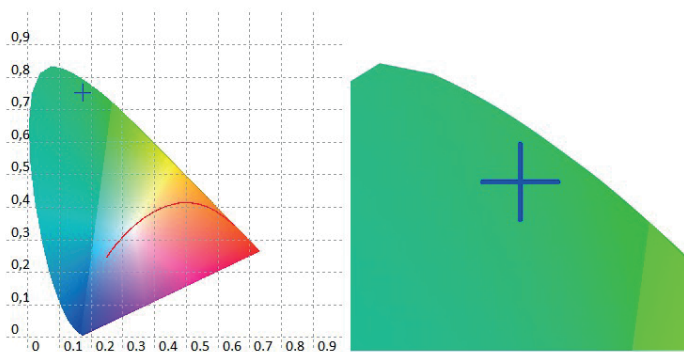

### CIE1976

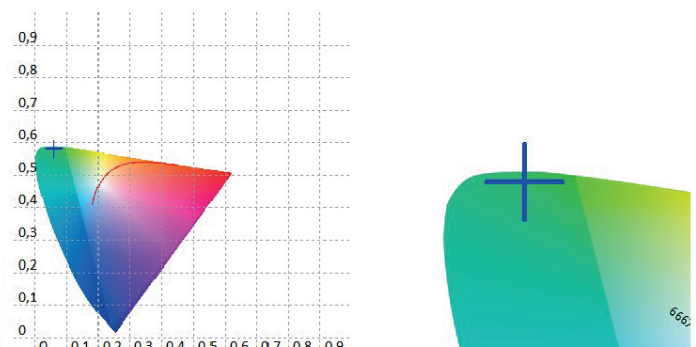

## Deep Amber (Lee #104) Filter Spectrum Test Report

Slot #4

Medium Zoom @ 5m

**UPRtek**  
United Power Research Technology Corporation


### Information

|                            |                        |
|----------------------------|------------------------|
| User : R&D department      | Measure Time :14:45:56 |
| Model NO. : MK350S PREMIUM | Light Source :ENZO     |
| Memo :                     |                        |


### BASIC

|        |          |
|--------|----------|
| I-Time | : 960 us |
| x      | : 0,5645 |
| y      | : 0,4297 |
| CCT    | : 1815   |
| LUX    | : 6136   |


### Spectrum

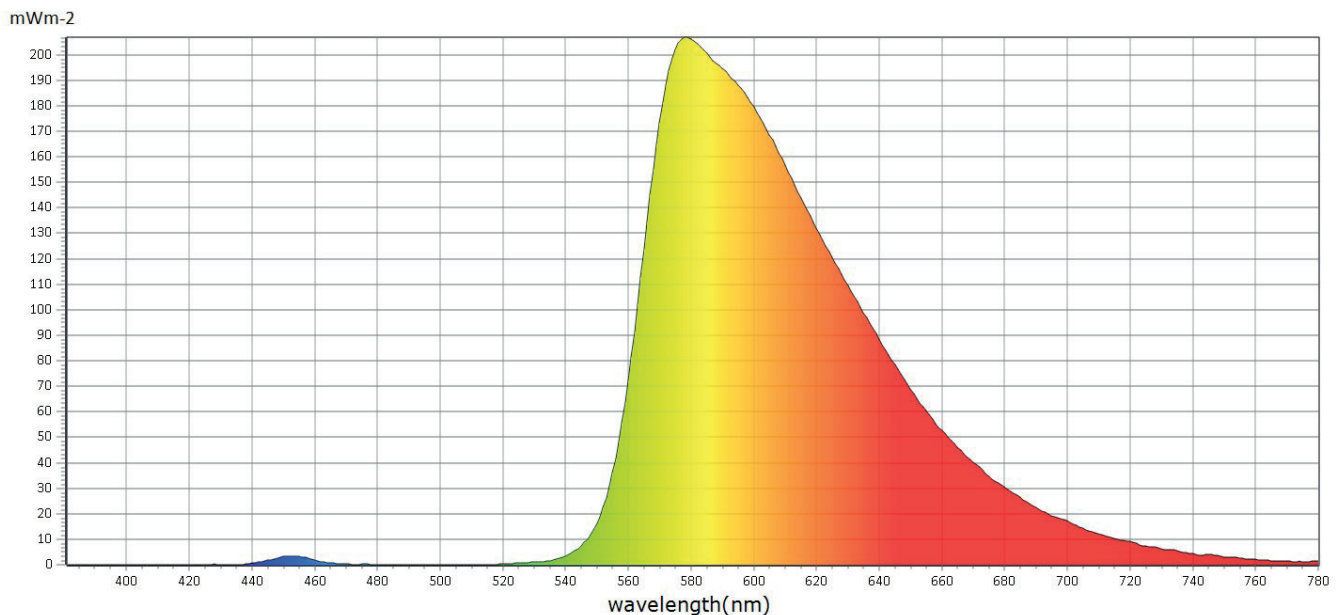

### CIE1931

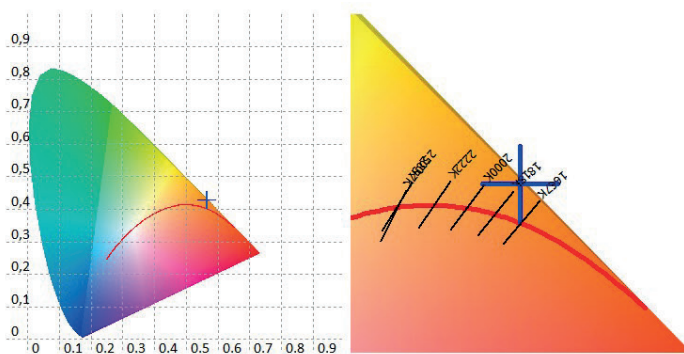

### CIE1976

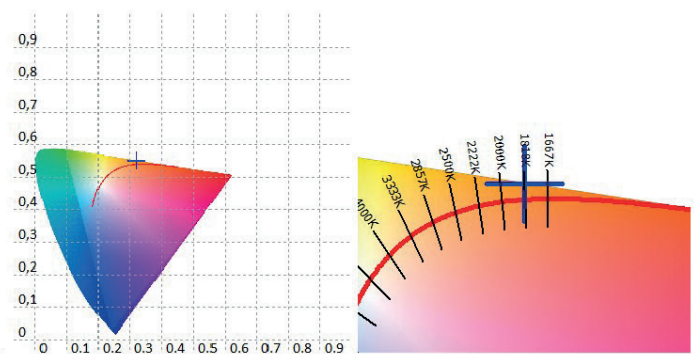



## AS Golden Amber (Lee #780) Filter Spectrum Test Report

Slot #5

Medium Zoom @ 5m

**UPRtek**  
United Power Research Technology Corporation


### Information

|                            |                        |
|----------------------------|------------------------|
| User : R&D department      | Measure Time :14:46:20 |
| Model NO. : MK350S PREMIUM | Light Source :ENZO     |
| Memo :                     |                        |


### BASIC

|        |           |
|--------|-----------|
| I-Time | : 1600 us |
| x      | : 0,6621  |
| y      | : 0,3368  |
| CCT    | : 0       |
| LUX    | : 1812    |


### Spectrum

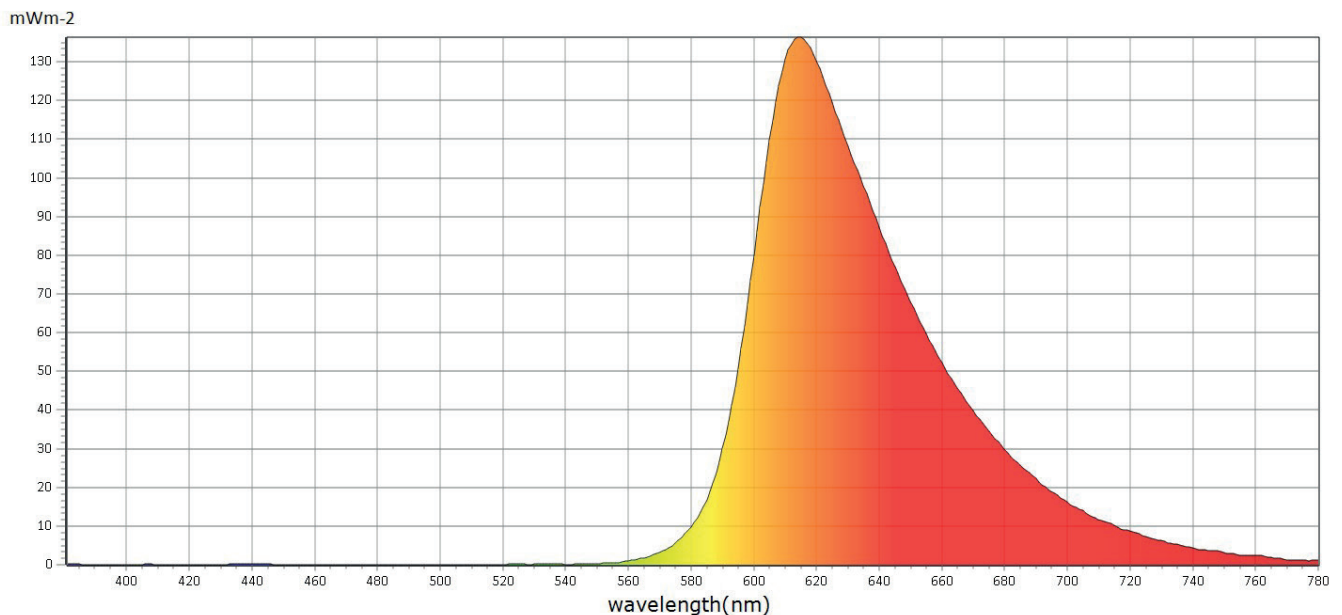

### CIE1931

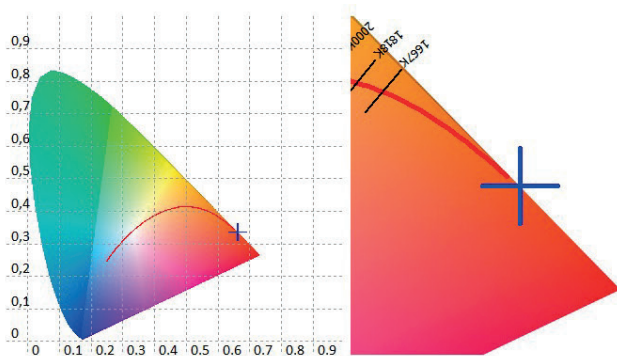

### CIE1976

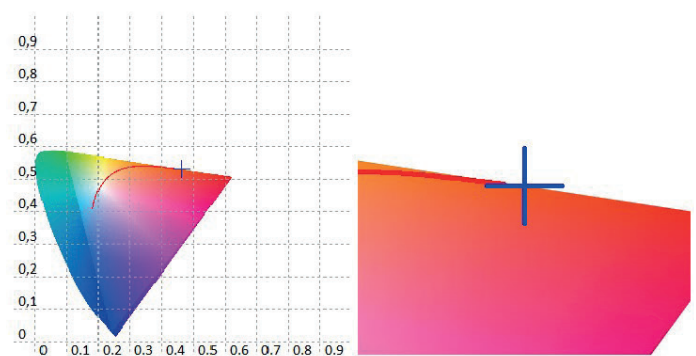

---

---

# *Starway*

22 Rue Édouard Buffard  
77144 Montevrain  
France

[starway.eu](http://starway.eu)

---

---